




Available in sheet & tile


- ▣ Sustainable slip resistance throughout the product life
- ▣ Safety Clean xp PUR reinforced surface for improved stain resistance and ease of maintenance
- ▣ Ultimate flexibility for easy installation
- ▣ Minimum 40% recycled content — helping the environment

VINYL FLOORCOVERING WITH ENHANCED SLIP RESISTANCE


Safetred Spectrum




895 Onyx
[weld rod 1291845] LRV 6.40




810 Battleship
[weld rod 1292329] LRV 14.90




805 Shale
[weld rod 1292105] LRV 28.30




800 Silver
[weld rod 1288314] LRV 44.20




865 Violet
[weld rod 1287220] LRV 21.80




850 Cobalt
[weld rod 1291354] LRV 13.40




845 Riviera
[weld rod 1288344] LRV 24.10




855 Denim
[weld rod 1292030] LRV 16.60




860 Sky
[weld rod 1287047] LRV 40.40




840 Olive
[weld rod 1287219] LRV 24.50




835 Emerald
[weld rod 1291863] LRV 18.30




830 Verdi gris
[weld rod 1287218] LRV 34.90




890 Pistachio
[weld rod 1287171] LRV 42.50



825 Russet
[weld rod 1287217] LRV 22.70



820 Sepia
[weld rod 1287216] LRV 32.60

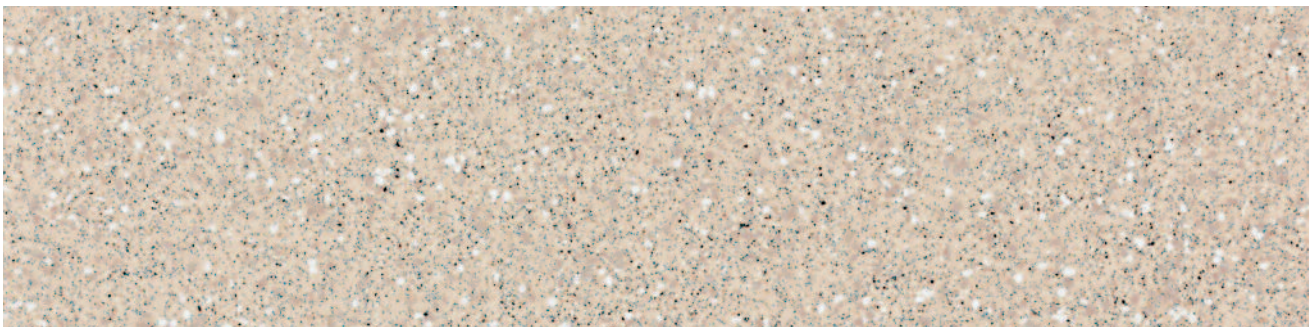

815 Ecrú
[weld rod 1291615] LRV 52.10

Options available in 50 x 50cm tile



VINYL FLOORCOVERING WITH ENHANCED SLIP RESISTANCE

Safetred Spectrum

Specification

Slip resistant heavy duty vinyl sheet floorcovering, available in a choice of specification including unique tile option. Safety Clean XP PUR protection for ease of maintenance.
Product standard EN 13845

Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements against the need of sustainable solutions. That's why all of our products come with a special tag giving the essential information about sustainability and environmental health.



Choosing good materials that become safe reusable nutrients



Using natural resources effectively



Creating safer and healthier spaces



Developing reuse and recycling

Tarkett's commitments to VOC* emissions

Currently, all floorings that Tarkett manufactures have VOC emissions of less than 100µg/m³ (TVOC after 28 days) contributing to better interior air quality. This makes Tarkett an industry reference for VOC reduction with floorings that have 10 times less VOC emissions than current European standards.

Our commitment to better air quality in buildings and homes is a key part of our new Balanced Choice Tag. It gives information about the content of our products and how they contribute to sustainable development enabling customers to make their balanced choice.

* VOC: Volatile Organic Compound



Classification	Standards	Safetred Spectrum
Type of floorcovering	EN 13845	PVC floorcovering with particle enhanced slip resistance
Classification	EN ISO 10874 (EN 685) EN 13845	Commercial 34 Industrial 43 ESf

Technical Characteristics	Standards	
Total thickness	EN ISO 24346 (EN 428)	2.0 mm
Total weight	EN ISO 23997 (EN 430)	3250g/m ²
Form of delivery	EN ISO 24341 (EN 426) EN ISO 24342 (EN 427)	Rolls: 20 lm x 2 m 3819 _ _ _ (3 digit colour no.) Tiles: 50 x 50 cm 16 tiles/box = 4m ² 3792 _ _ _ (3 digit colour no.)

Technical Performance	Standards	
PUR reinforcement		Safety Clean XP
Abrasion group	EN 13845	< 10% Particle loss
Residual indentation	EN ISO 24343-1 (EN 433)	< 0.10 mm
Castor chair test	ISO 4918 (EN 425)	No damage
Furniture leg	EN 424	No damage
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Curl resultant to heat	EN ISO 23999 (EN434)	< 2mm
Reaction to fire	EN 13501-1 ISO 9239-1	Bfl s1 on cement > 8 kW/m ²
Slip resistance	TRRL Pendulum 4S (Wet) BS 7976 part 2 Surface Roughness DIN 51130 DIN 51097	>36 >20µm R10 A
Electrostatic properties	EN 1815 EN 1081	2 kV on cement >10 ¹⁰ Ohms
Light fastness	EN ISO 105-B02	7
Chemical resistance	EN ISO 26987 (EN 423)	Good resistance to everyday substances
Thermal resistance	EN 12524	0.01 m ² K/W
Underfloor heating		Suitable max: 27°C
Colours		16

The above information is subject to modifications for the benefit of further improvement. (12/13). For more detailed technical information, please contact Tarkett. Follow Tarkett's installation and maintenance instructions carefully, these instructions are available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE

100%
40%
Recyclable
Recycled content

< 100µg/m³
Better Indoor
Air Quality

A+
BRE
GENERIC ENVIRONMENTAL
RATING

MANUFACTURED
IN THE UK

*TVOC AT 28 DAYS

EN 14041:2004
0538-CPD-1002

Manufactured by:
Tarkett Limited
ME17 2QX, Lenham,
Maidstone, Kent
UNITED KINGDOM

According to European Classification
EN ISO 10874 (EN685)

Safety Clean
XP
PUR REINFORCED

SGS
SGS
SGS



"Improved flexibility for easy installation and handling!"