

VINYL
FLOORCOVERING
WITH ENHANCED
SLIP RESISTANCE

NEW
& IMPROVED

SAFETRED WOOD

NEW COLOURS with safety clearly InGrained

- 'Smart Particle Technology' for a more natural looking finish
- 'Super Matt' surface effect
- More resistant to scuff and stains
- A True commercial safety floor EN13845 with domestic appeal
- Tarkett's industry leading 'responsible PVC', Low VOC's and Phthalate free for best indoor air quality
- Loose lay option available - saves time on installation
- Acoustic option available for better impact sound reduction





SAFETRED WOOD

NEW COLOURS with safety clearly InGrained

NEW **Safetred Wood** from Tarkett is the latest in a new generation of 21st century safety floors.

Still with a full commercial slip resistance rating throughout the product life, new Safetred Wood now offers the most contemporary trends in wood species and colours.

The elegant greys and rich natural oak tones are further enhanced with a new 'super matt' effect surface which also delivers better stain and scuff resistance.

With the new 'Smart Particle Technology', Safetred Wood, looks and performs better than ever.

- Full commercial slip resistance rating
- 'Super Matt' surface preventing glare from the floor
- More resistant to scuff and stains
- 'Smart Particle Technology' gives a cleaner, smoother, more natural looking surface
- Ideal for any application where a more 'domestic' look is desirable without compromising performance




NEW Tarkett 'Smart Particle Technology' uses smaller, clearer aluminium oxide granules which allow for more visibility of the surface design whilst still providing full, contract grade, slip resistance.



“Qualitative, beautiful and healthy floors give people composure and dignity, thus contributing to a positive feeling. Floor design can help people to slow down, to concentrate, to orientate themselves, to have fun or to move freely.”

Extract from 'Designing Dementia Facilities' study by Tarkett

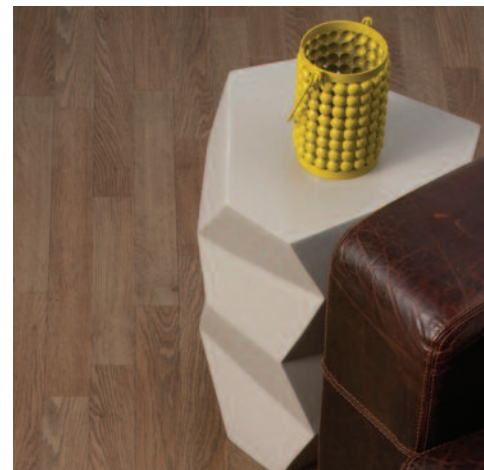

011 Traditional oak grey white




012 Traditional oak middle natural



013 Traditional oak mid grey



014 Traditional oak warm



009 Beech natural



007 Trend oak white



006 Trend oak natural



001 Traditional oak light




002 Traditional oak natural



015 Trend oak steel grey



016 Trend oak smart walnut



004 Traditional oak dark

Also available in loose lay and acoustic*

*Available to order – minimum 2 rolls

VINYL FLOORCOVERING WITH ENHANCED SLIP RESISTANCE

SAFETRED WOOD

NEW COLOURS with safety clearly InGrained



Classification	Standards	Safetred Wood	Safetred Wood LL	Safetred Wood Acoustic
Type of floorcovering	EN 13845	PVC Floorcovering with particle enhanced slip resistance		
Classification	EN 13845 EN ISO 10874 (EN 685)	Esf Commercial 34 Industrial 43	Esf Commercial 34 Industrial 43	Esf Commercial 34 Industrial 43
Technical Characteristics	Standards	Safetred Wood	Safetred Wood LL	Safetred Wood Acoustic
Total thickness	EN ISO 24346 (EN 428)	2.0mm	2.35mm	3.5mm
Total weight	EN ISO 23997 (EN 430)	3340 g/m ²	3410 g/m ²	3750 g/m ²
Form of delivery	EN ISO 24341 (EN 426)	20 lm x 2m (40m ²) Wood 4676 ___ (3 digit colour no.)	15 lm x 2m (30m ²) Wood 26752 ___ (3 digit colour no.)	15 lm x 2m (30m ²) Wood 26753 ___ (3 digit colour no.)
Technical Performances	Standards	Safetred Wood	Safetred Wood LL	Safetred Wood Acoustic
PUR reinforcement		Safety Clean XP	Safety Clean XP	Safety Clean XP
Abrasion group	EN 13845 Annex D EN 660: Part 2	≤ 10% Particle loss T ≤ 0.04 mm	≤ 10% Particle loss T ≤ 0.04 mm	≤ 10% Particle loss T ≤ 0.04 mm
Residual indentation	EN ISO 24343-1 (EN 433)	< 0.10 mm	< 0.11 mm	< 0.15 mm
Castor chair test	ISO 4918 (EN 425)	No damage	No damage	No damage
Furniture leg	EN 424	No damage	No damage	No damage
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%	≤ 0.10%	≤ 0.10%
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 8 mm	≤ 8 mm	≤ 2 mm
Reaction to fire	EN 13501-1	Bfl s1 on cement	Cfl s1 on cement	Cfl s1 on cement
Slip resistance	TRRL Pendulum 4S (Wet) Surface roughness DIN 51130 EN 13893	> 36 ≥ 20µm R10 ≥ 0.3	> 36 ≥ 20µm R10 ≥ 0.3	> 36 ≥ 20µm R10 ≥ 0.3
Electrostatic properties	EN 1815 EN 1081 EN 14041	< 2 kV R1 < 10 ⁹ Ohms Antistatic on cement	< 2 kV R1 < 10 ⁹ Ohms Antistatic on cement	< 2 kV R1 < 10 ⁹ Ohms Antistatic on cement
Impact sound reduction	EN ISO 717/2	Δ Lw = 4 dB	Δ Lw = 11 dB	Δ Lw = 17 dB
Acoustic improvement	NFS 31-074	L,n,e,w = 76 dB	L,n,e,w = 70 dB	L,n,e,w = 61 dB
Light fastness	EN ISO 105-B02	7	7	7
Chemical resistance	EN ISO 26987 (EN 423)	High Resistance	High Resistance	High Resistance
Thermal resistance	EN 12524	0.01 m ² K/W	0.01 m ² K/W	0.01 m ² K/W
Underfloor heating		Suitable - Max 27°C	Suitable - Max 27°C	Suitable - Max 27°C
Colours		Wood 12	Wood 12 (to order - minimum 2 rolls)	Wood 12 (to order - minimum 2 rolls)


The Safetred Wood range are all available in a choice of Compact, Loose Lay and Acoustic.

The above information is subject to modifications for the benefit of further improvement. (08/16)

For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE

Tarkett's commitments to VOC* emissions

Volatile organic compounds (VOCs) are emitted as gases from manmade materials such as flooring as well as natural ones like trees. To improve indoor air quality, Tarkett has invested significantly in the research of raw materials and flooring manufacturing processes to reach near zero emission levels. Since September 2011 all Tarkett's homogeneous vinyl flooring has emissions below quantifiable level – measuring less than 10 µg/m³ TVOC after 28 days*. All other commercial floorings that Tarkett manufactures currently release less than 10 µg/m³ TVOC after 28 days – ten times lower than European standards. We'll continue to focus on safer, healthier solutions to reduce emission levels across all products, for improved indoor air quality and a healthier quality of life.
* ISO standards 16000-3/-6/-9/-11

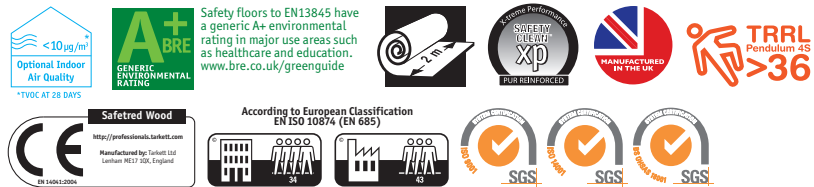

Loose Lay

- Can be loose laid up to 100m²
- Suitable for laying over uneven subfloors**
- Can be laid over damp subfloor up to 90% RH

SAFETRED WOOD LL

Acoustic

- Impact sound reduction – 17dB
- Unique indentation properties – 0.15mm

SAFETRED WOOD ACOUSTIC

Tarkett Limited Lenham, Maidstone, Kent ME17 2QX, United Kingdom. Tel 01622 854040 Fax 01622 854520 www.tarkett.co.uk Email: uksales@tarkett.com



www.tarkett.co.uk