





Cetus

6 Colourways



BROADLOOM DESIGN



TESSELLATED DESIGN



AVAILABLE
FROM STOCK

Cetus

6 Colourways




Heavy Contract

Universal Solution
Dyed Nylon 6.6


10 Year
Warranty

6
Colourways

100% Envirobase
- minimum of 50%
recycled material



BROADLOOM DESIGN



TESSELLATED DESIGN



LOWEST CARBON
EMISSIONS
TILE FACTORY IN THE EU



paragon3R
RECOVER • RECYCLE • REUSE



MADE IN BRITAIN

AVAILABLE
FROM STOCK

Cetus



| | |
|---------------------|--|
| Style | 1/10th Tufted multi-level loop pile |
| Yarn Construction | Universal Solution Dyed Nylon 6.6 |
| Pile Yarn Weight | 510 gsm |
| Pile Height | 4mm |
| Total Weight | 3960gsm |
| Total Thickness | 7mm |
| Backing | 100% Envirobase - minimum of 75% recycled material |
| Additional Backing | 100% Komfort Bac available on request |
| Dimensions | 50cm x 50cm |
| Wear Classification | Heavy Contract |
| Anti-static | Less than 2kV |
| Colour Fastness | To Light (ISO105 – BO2) > 6 To Water (ISO 105 - E01) > 5 To Rubbing (ISO 105 - X12) > 5 dry, 4-5 wet |
| Flammability | Cfl-S1 |
| Castor Chair Test | BS EN 985 continuous use |
| Warranty | 10 Years |
| VOC Content | E1 in relation to EN 14041:2004 |



INSTALLATION


Sub floors should be clean, dry and flat and prepared in accordance with BS5325. Timber floors should be covered with plywood or other appropriate sheet materials. For tiles use F Ball tackifier F41 or Laybond 79. Tiles may be laid tessellated or broadloom. Tiles should be allowed to condition for a minimum of 24 hours at the expected temperature and humidity prevailing when the building is in use. Always use seam sealer if an impermeable finish is required. Further installation information is available from the Paragon Sales Office.

COLOUR


For technical reasons, as with all textile materials, it may not be possible to colour match from different batches. Orders requiring colour match should be placed at the same time. Production may therefore show variations to the sample card.

MAINTENANCE


It is recommended that a maintenance schedule be initiated from the date of installation to achieve maximum life expectancy of the product. Regular vacuum cleaning with a twin motored upright vacuum cleaner is essential. All spillages and stains should be attended to immediately. For detailed information, please consult the Paragon cleaning and maintenance guide. It is imperative that all internal carpets are well protected from outside soiling and moisture by the use of barrier matting such as MatWorks, also available from Paragon.

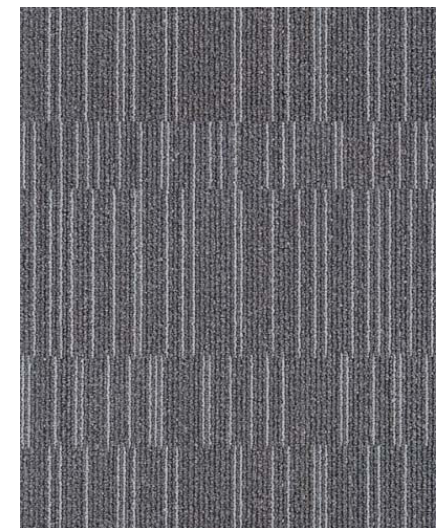


Denab
(LRV - Y8.25)

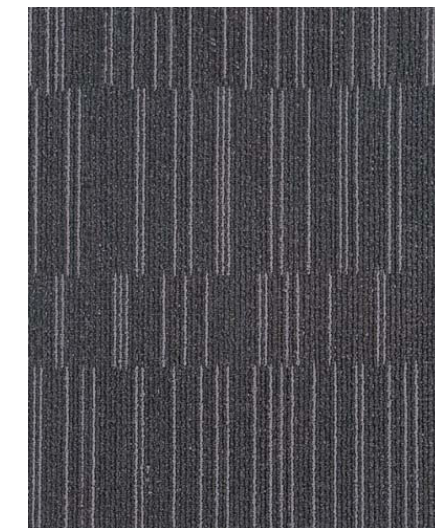

Menkar
(LRV - Y3.44)

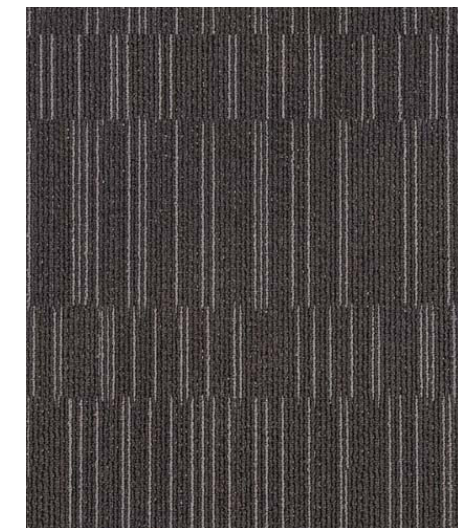


Mira
(LRV - Y3.72)

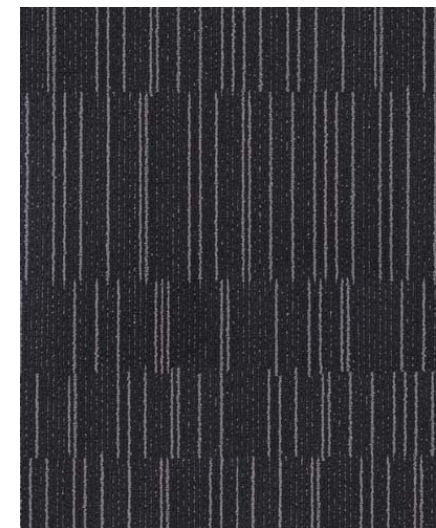

Schemali
(LRV - Y2.26)



Collum
(LRV - Y2.00)

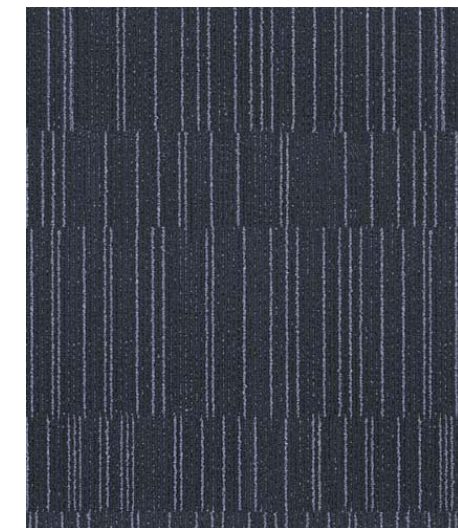

Rana
(LRV - Y3.07)

NOTE : Results are based on internal testing of new unused products



Farfield Park
Manvers
Wath-upon-Dearne
Rotherham, S63 5DB
T. +44 (0) 1709 763 839
F. +44 (0) 1709 763 813
E. sales@paragon-carpets.co.uk
W. www.paragon-carpets.co.uk

| | | | | |
|---|--|--|---------------------------|--|
| | | | | |
| 545333 12 | Certificate No: EM873345 Fully accredited with ISO14001 | | FM00644 BS EN ISO 9001 | |
| EN 14041:2004 Product Type Bitumen backed tufted carpet tile Reaction to fire Class Bfl-s1 Slipperiness NPD | | | | |



Experience Carpet Tiles


paragon
CARPET TILES




Cetus

6 Colourways

A Division of National Floorcoverings Ltd.
Farfield Park, Manvers, Wath-upon-Deerne, Rotherham, S63 5DB T. +44(0) 1709
763839 Samples Department: +44(0) 1709 763805.
Order Free Samples Online E. samples@paragon-carpets.co.uk
www.paragon-carpets.co.uk | www.mat-works.co.uk



BROADLOOM DESIGN



TESSELLATED DESIGN



AVAILABLE
FROM STOCK



i colour wheel www.paragon-app.com



Download our free apps NOW

Search Paragon Carpets

