

HETEROGENEOUS
VINYL
FLOORCOVERING

CONTRACT WOOD

Hausmann dark grey



THE ULTIMATE
FLOORING EXPERIENCE

HETEROGENEOUS
VINYL
FLOORCOVERING

CONTRACT WOOD

- ☐ Heavy traffic sheet floorcovering, ideal for all commercial areas
 - ☐ Excellent resistance to indentation and abrasion
 - ☐ 2m width available from UK stock*
- *4m available to order



Hausmann Natural

2DAYexpress

4m compact: 25099069
62 x 8 cm plank
[weld rod 1294315] LRV 33

2m compact: 25098069



Hausmann Dark grey

2DAYexpress

4m compact: 25099070
62 x 8 cm plank
[weld rod 1287537] LRV 20

2m compact: 25098070



Hausmann Warm brown

2DAYexpress

4m compact: 25099071
62 x 8 cm plank
[weld rod 1294429] LRV 14

2m compact: 25098071




Beech Light natural 4m compact: 25099029 2m compact: 25098029
 30/26.5 x 7 cm plank
2DAYexpress [weld rod 1287285] LRV 42



Oak Grey beige 4m compact: 25099035 2m compact: 25098035
 100 x 16.6 cm plank
2DAYexpress [weld rod 1294428] LRV 26



Faro 2 Natural 4m compact: 25099034 2m compact: 25098034
 100 x 12.5 cm plank
2DAYexpress [weld rod 1292101] LRV 29

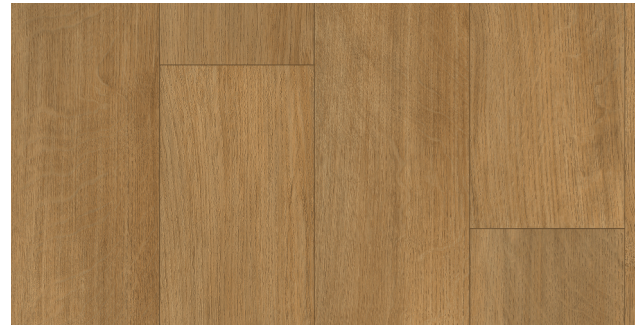


Oak Middle natural 4m compact: 25099074 2m compact: 25098074
 100 x 16.6 cm plank
2DAYexpress [weld rod 1287505] LRV 23




Faro 2 Anthracite 4m compact: 25099072 2m compact: 25098072
 100 x 12.5 cm plank
2DAYexpress [weld rod 1287333] LRV 17




Oak Natural honey 4m compact: 25099075 2m compact: 25098075
 100 x 16.6 cm plank
2DAYexpress [weld rod 1287153] LRV 23

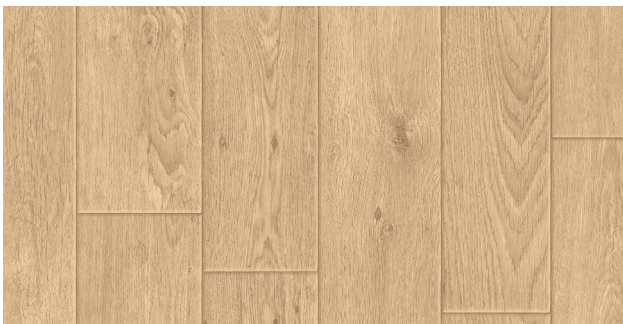


Faro 2 Warm beige 4m compact: 25099073 2m compact: 25098073
 100 x 12.5 cm plank
2DAYexpress [weld rod 1294852] LRV 38

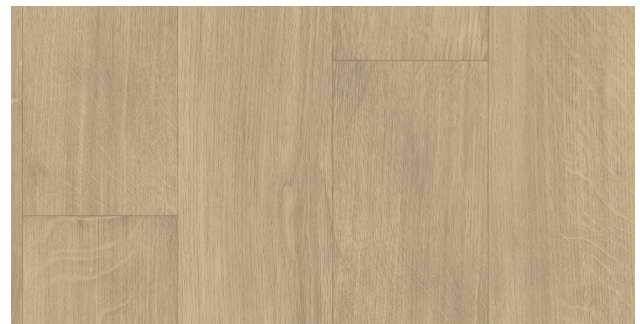

Oak Beige 4m compact: 25099076 2m compact: 25098076
 100 x 16.6 cm plank
2DAYexpress [weld rod 1287733] LRV 38

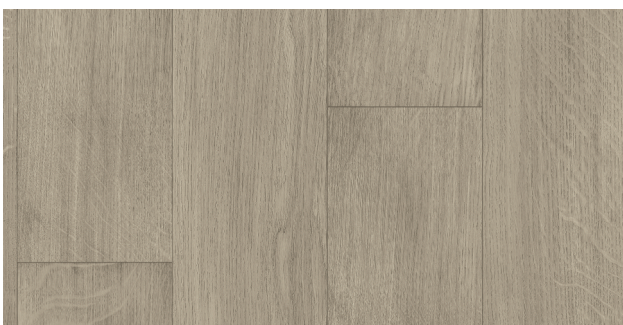

Oak Grey 4m compact: 25099036 2m compact: 25098036
 100 x 16.6 cm plank
2DAYexpress [weld rod 1287713] LRV 29

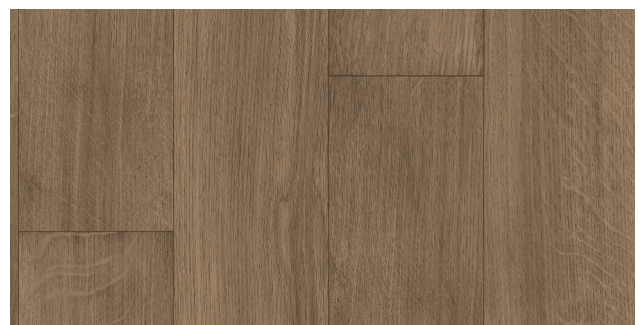

Oak Dark brown 4m compact: 25099077 2m compact: 25098077
 100 x 16.6 cm plank
2DAYexpress [weld rod 1294429] LRV 16

HETEROGENEOUS
VINYL
FLOORCOVERING

CONTRACT WOOD



AGED CARE

**2DAY
express** £₀
Core collection from Tarkett
AVAILABLE TODAY FROM STOCK



Classification	Standards	Contract Wood
Type of floorcovering	ISO 10582 Type 1 EN 651	Resilient floorcovering - Heterogeneous compact poly (vinyl chloride) floorcovering
Classification	ISO 10874	Commercial 34 Industrial 43

Technical Characteristics	Standards	Contract Wood
Total thickness	ISO 24346	2.0mm
Total wear layer thickness	ISO 24340	0.70mm
Total weight / m ²	ISO 23997	3000 g/m ²
Polyurethane reinforcement	-	TOP CLEAN
Wear layer binder content	ISO 10582	Type 1
Form of delivery	ISO 24341 Sheet (rolls)	Approx. 23 running metres x 200cm 2m Compact 25098 ___ 4m Compact 25099 ___ (3 digit colour no.)

Technical Performances	Standards	Contract Wood
Impact sound reduction	EN ISO 717/2 NF S31-074	Δ Lw = 5 dB Class C
Residual indentation	Average measured value ISO 24343-1	0.02mm ≤ 0.10 mm
Reaction to fire	EN 13501-1	Bfl s1 glued over concrete and wood substrates
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%
Furniture leg	EN 424	No damage
Castor chair test	ISO 4918	No damage
Curl resistant to heat	ISO 23999	≤ 8 mm
Total VOC emissions	ISO 16000	< 100µg/m ³
Light fastness	ISO 105-B02	≥ 6
Chemical resistance	ISO 26987	High Resistance
Electrostatic property	EN 1815 EN 1081	< 2kV on concrete R1 > 10 ⁹ ohms
Thermal resistance	EN ISO 10456	0.02 m ² K/W
Underfloor heating		Suitable
Colours		13

The above information is subject to modifications for the benefit of further improvement. (02/17)

For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE

Tarkett's commitments to VOC* emissions

Volatile organic compounds (VOCs) are emitted as gases from manmade materials such as flooring as well as natural ones like trees. To improve indoor air quality, Tarkett has invested significantly in the research of raw materials and flooring manufacturing processes to reach near zero emission levels. Since September 2011 all Tarkett's homogeneous vinyl flooring has emissions below quantifiable level – measuring less than 10 µg/m³ TVOC after 28 days*. All other commercial floorings that Tarkett manufactures currently release less than 10 µg/m³ TVOC after 28 days – ten times lower than European standards. We'll continue to focus on safer, healthier solutions to reduce emission levels across all products, for improved indoor air quality and a healthier quality of life.
* ISO standards 16000-3/-6/-9/-11



INSTALLATION NOTICE. Not suitable for double drop installation.
Contract Wood products are supplied with a special back coating film making them unsuitable for double drop installation.
Please refer to installation instructions for full details.

Tarkett Limited Lenham, Maidstone, Kent ME17 2QX, United Kingdom. Tel 01622 854040 Fax 01622 854520 www.tarkett.co.uk Email: uksales@tarkett.com



www.tarkett.co.uk