

HETEROGENEOUS VINYL FLOORCOVERING

CONTRACT NATURE

NOW AVAILABLE with 19dB acoustic option

- Heavy traffic sheet floorcovering, ideal for all commercial and residential areas
- Excellent resistance to indentation and abrasion
- 2m width available from UK stock*
- Contract Nature 19dB option available to order
- *4m Available to order



Middle grege
4m compact: 25099052
2m compact: 25098052
2m acoustic: 25086002
2DAYexpress [weld rod 1287443] LRV 44




Light grege
4m compact: 25099078
2m compact: 25098078
2m acoustic: 25086014
2DAYexpress [weld rod 1287685] LRV 55



Sand
4m compact: 25099063
2m compact: 25098063
2DAYexpress [weld rod 1287174] LRV 53




Cold dark grey
4m compact: 25099045
2m compact: 25098045
2m acoustic: 25086007
2DAYexpress [weld rod 1287308] LRV 16

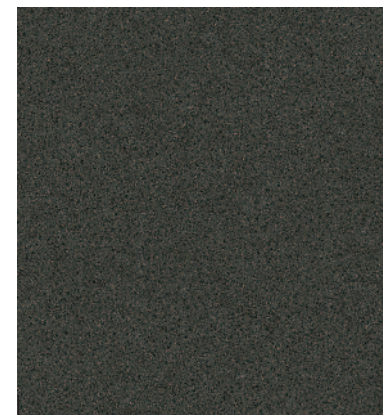


Black
4m compact: 25099046
2m compact: 25098046
2m acoustic: 25086008
2DAYexpress [weld rod 1287526] LRV 9



Warm medium grey
4m compact: 25099049
2m compact: 25098049
2m acoustic: 25086010
2DAYexpress [weld rod 1287435] LRV 51

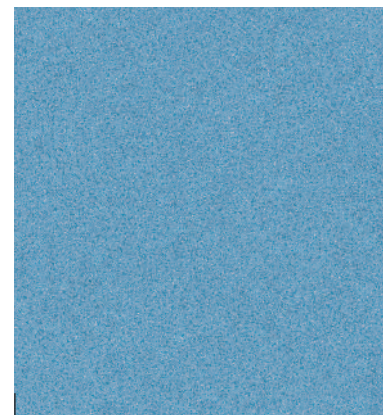

Fresh blue
4m compact: 25099055
2m compact: 25098055
2m acoustic: 25086000
2DAYexpress [weld rod 1287804] LRV 29

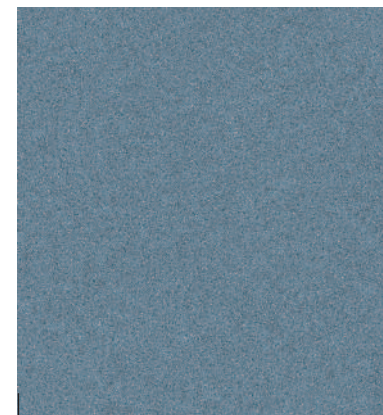

Dark blue
4m compact: 25099109
2m compact: 25098109
2m acoustic: 25086009
2DAYexpress [weld rod 1287385] LRV 16



Royal purple
4m compact: 25099081
2m compact: 25098081
2DAYexpress [weld rod 1287220] LRV 23

HETEROGENEOUS VINYL FLOORCOVERING

CONTRACT WOOD & CONTRACT NATURE

NOW AVAILABLE with 19dB acoustic option and NEW Haussmann wood designs

2DAYexpress Core collection from Tarkett

Haussmann dark grey

CONTRACT WOOD & CONTRACT NATURE

HETEROGENEOUS VINYL FLOORCOVERING

CONTRACT WOOD & CONTRACT NATURE



2DAYexpress Core collection from Tarkett AVAILABLE TODAY FROM STOCK



Tarkett's commitments to VOC* emissions


Volatile organic compounds (VOCs) are emitted as gases from manmade materials such as flooring as well as natural ones like trees. To improve indoor air quality, Tarkett has invested significantly in the research of raw materials and flooring manufacturing processes to reach near zero emission levels. Since September 2011 all Tarkett's homogeneous vinyl flooring has emissions below quantifiable level - measuring less than 10 µg/m³ TVOC after 28 days*. All other commercial floorings that Tarkett manufactures currently release less than 10 µg/m³ TVOC after 28 days - ten times lower than European standards. We'll continue to focus on safer, healthier solutions to reduce emission levels across all products, for improved indoor air quality and a healthier quality of life. *ISO standards 16000-3/-6/-9/-11

Classification	Standards	Contract Wood & Contract Nature	Contract Nature Acoustic
Type of floorcovering	ISO 10582 Type I EN 651	Resilient floorcovering - Heterogeneous compact poly (vinyl chloride) floorcovering	Resilient floorcovering Polyvinyl chloride floorcovering with foam layer
Classification	ISO 10874	Commercial 34 Industrial 43	Commercial 34 Industrial 42

Technical Characteristics	Standards	Contract Wood & Contract Nature	Contract Nature Acoustic
Total thickness	ISO 24346	2.00mm	3.00mm
Total wear layer thickness	ISO 24340	0.70mm	0.70mm
Total weight / m²	ISO 23997	3000 g/m²	2500 g/m²
Polyurethane reinforcement	-	TOP CLEAN	TOP CLEAN
Wear layer binder content	ISO 10582	Type I	Type I
Form of delivery	ISO 24341 Sheet (rolls)	Approx. 23 running metres x 200cm 2m Compact 25098 ___ 4m Compact 25099 ___ (3 digit colour no.)	Approx. 23 running metres x 200cm 2m Acoustic 25086 ___ (3 digit colour no.)

Technical Performances	Standards	Contract Wood & Contract Nature	Contract Nature Acoustic
Impact sound reduction	EN ISO 717/2 NF 531-074	Δ Lw = 5 dB Class C	Δ Lw = 19 dB Class A
Residual indentation	Av. measured value ISO 24343-1	0.02mm ≤ 0.10 mm	0.11mm ≤ 0.20 mm
Reaction to fire	EN 13501-1	Bfl s1 glued over concrete and wood substrates	Cfl s1 glued over concrete and wood substrates
Slip resistance	DIN 51130 EN 13893	R10 ≥ 0.30	R9 ≥ 0.30
Dimensional stability	ISO 23999	≤ 0.10%	≤ 0.10%
Furniture leg	EN 424	No damage	No damage
Castor chair test	ISO 4918	No damage	No damage
Curl resistant to heat	ISO 23999	≤ 8 mm	≤ 8 mm
Total VOC emissions	ISO 16000	< 100µg/m³	< 100µg/m³
Light fastness	ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 26987	High Resistance	High Resistance
Electrostatic property	EN 1815 EN 1081	< 2kV on concrete R1 > 10⁹ ohms	< 2kV on concrete R1 > 10⁹ ohms
Thermal resistance Underfloor heating	EN ISO 10456	0.02m²K/W Suitable	0.04m²K/W Suitable
Colours		13 wood / 9 nature	7

The above information is subject to modifications for the benefit of further improvement. (02/17)
For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE

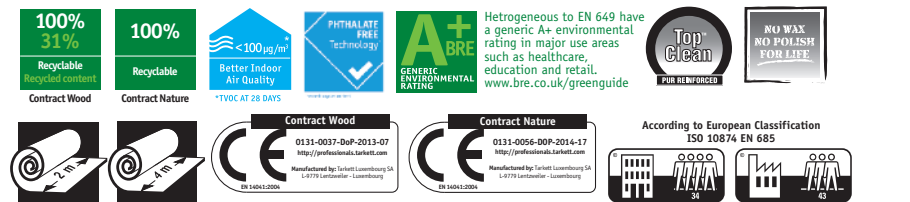

INSTALLATION NOTICE. Not suitable for double drop installation.
Contract Wood & Contract Nature products are supplied with a special back coating film making them unsuitable for double drop installation.
Please refer to installation instructions for full details.

Tarkett Limited Lenham, Maidstone, Kent ME17 2QX, United Kingdom. Tel 01622 854040 Fax 01622 854520 www.tarkett.co.uk Email: uksales@tarkett.com