

LINOLEUM

LINO

designed by nature



Tarkett

THE ULTIMATE
FLOORING EXPERIENCE

CONTENTS

Heritage	04
Natural	06
Design	10
Robust	26
Cleaning and maintenance	28
Technical solutions	30
Range overview	32
References	34
Technical data	38

Tarkett's Lino is made from natural ingredients in Narni, Italy, with the same original recipe since 1898, enabling Tarkett's team to gain a real know-how and to have an intimate understanding of every natural ingredient to adapt manufacturing to the variations of each year's crop.

We constantly innovate in production processes, develop colours and new striking designs and improve our flooring technical characteristics for specific uses such as acoustic comfort in Education or Electrostatic Discharge (ESD) control.

Tarkett's Lino combines tradition and innovation to meet the needs of consumers worldwide and provide them with a unique experience.

Our linoleum offers a timeless design and a robustness that stand the test of time.


HERITAGE

A TRADITIONAL FLOORING MADE IN ITALY

One of Italy's smallest regions, Umbria lies directly in the centre of Italy. Tarkett's linoleum plant began its production in Narni, Italy, at the end of 19th century, when European countries commonly used linoleum for flooring and wall-coverings. By the 1920s, there were around 100 sites making linoleum. In the early 1990s, Tarkett began to invest in the modernization of the entire production system. Today, Narni is accredited ISO 9001 and holds important environmental certifications including ISO 14001, ISO 14067, ISO 50001, OHSAS 18001, SWAN and Der Blaue Engel. Now only 4 factories - all in Europe - produce linoleum. Tarkett is a global player, exporting more than 90% of its linoleum across the world.¹




The Tarkett Linoleum plant at NARNI, easily recognisable by the characteristic shape of the ovens buildings, began its production of Linoleum at the end of the 19th century. The plant represents one of the first industries which shaped the industrial development of Narni and the surrounding area.

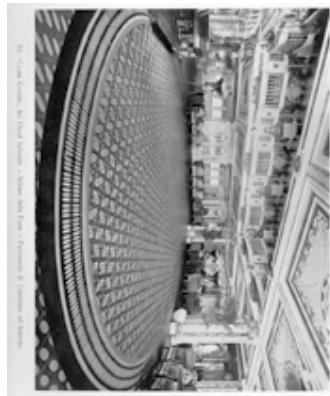

1929, Italy
The ball room of Conte
Grande Ship

Our core values

- Entrepreneurial spirit
- Operational excellence
- Deliver the ultimate flooring experience
- Positive customer attitude
- Empowerment and accountability
- Take care of the future

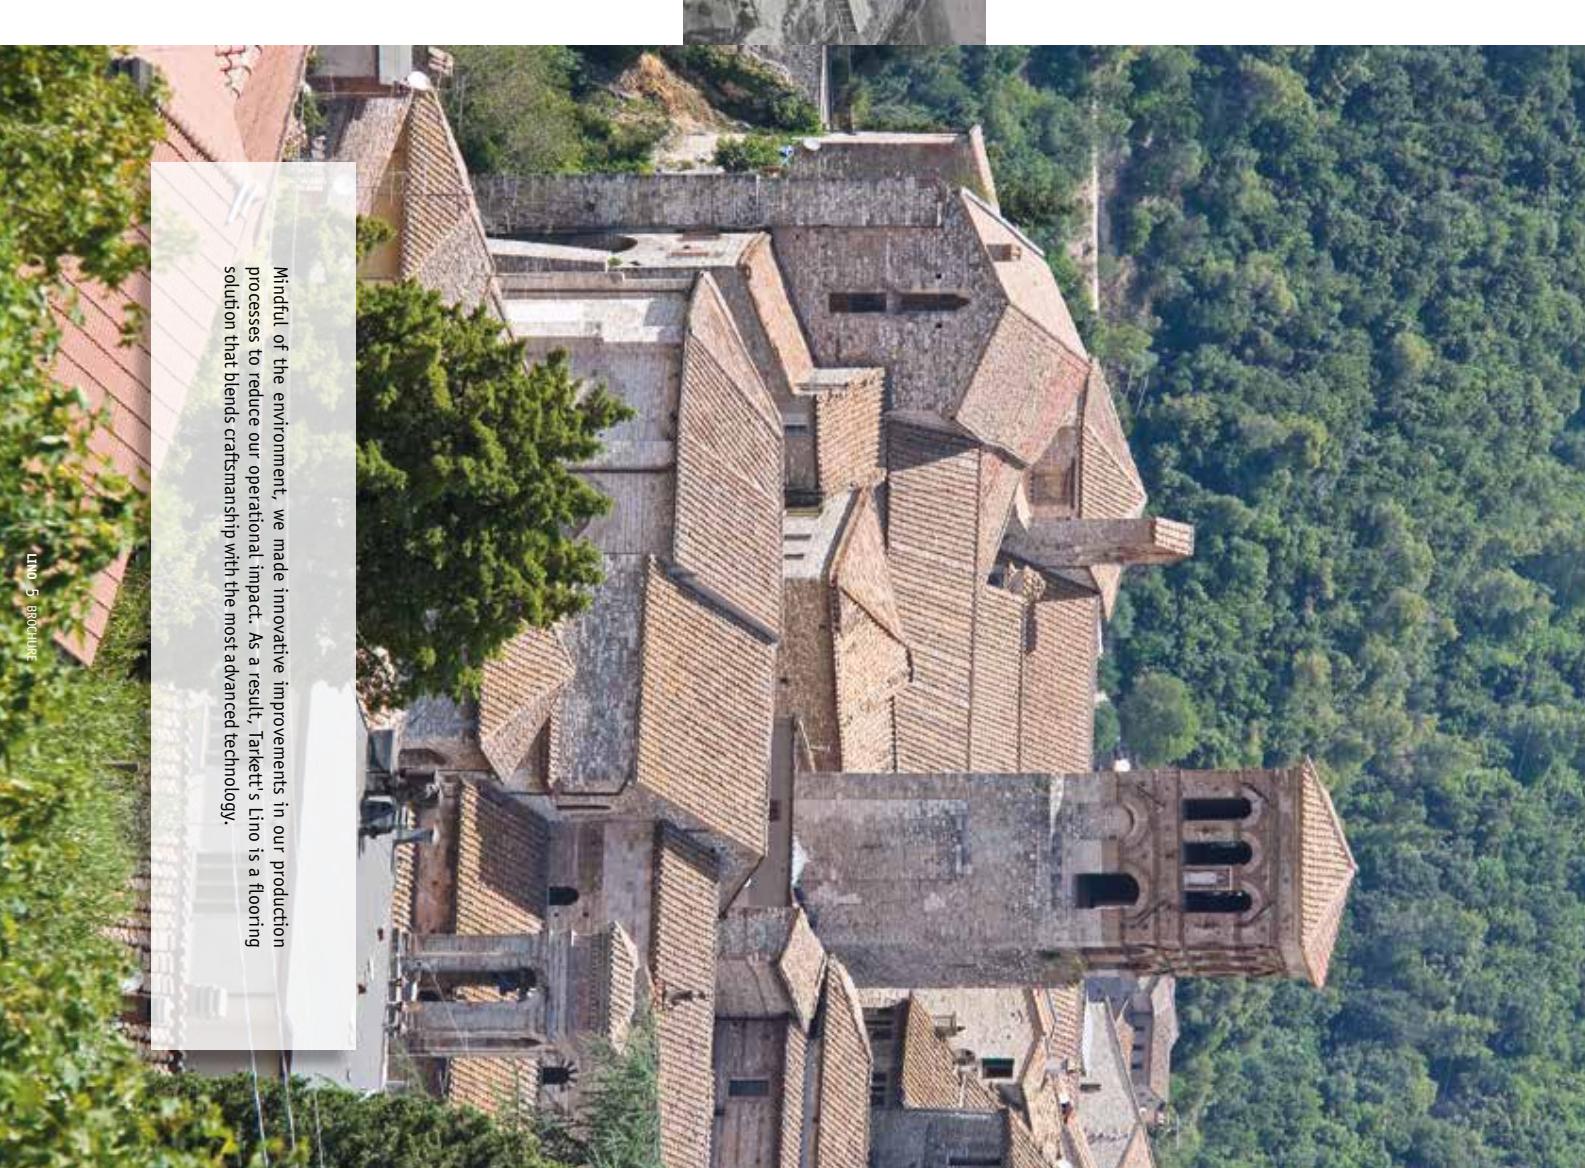

Mindful of the environment, we made innovative improvements in our production processes to reduce our operational impact. As a result, Tarkett's Lino is a flooring solution that blends craftsmanship with the most advanced technology.

THE NATURAL CHOICE FOR PEOPLE AND THE ENVIRONMENT

Tarkett's Lino is made from the same original recipe since 1898 and yet it continues to be a modern, versatile and sustainable flooring, made of natural and renewable ingredients such as linseed oil, pine rosin, wood and cork flour and jute. Our Cradle to Cradle® approach ensures we design our products to positively contribute to the environment and people's well-being at each step of the product's life, while supporting the transition to a circular economy business model.

We put in place a number of initiatives to achieve our ambition of a zero-emission site at Narni. To ensure a more responsible use of natural resources, we've installed systems such as heat exchangers that recover and reuse heat from ovens, a biomass boiler that produces hot water to heat the ovens and a closed-loop water system. These have helped us establish a more sustainable manufacturing approach and minimise our impact on the environment.



GOOD MATERIALS

You care about choosing a flooring made from natural and high quality ingredients?

In making linoleum, we use materials that contribute positively to people's health and the environment. Closed-loop design starts here, so that good materials become future resources that can be reused or returned to nature as biodegradable ingredients


- 94% natural raw materials - linseed oil, pine rosin, wood and cork flour, calcium carbonate and jute.
- 78% from abundant renewable resources - including local linen producers to reduce our carbon footprint. We support local linen producers to reduce our carbon footprint.
- 100% of ingredients have been positively assessed according to Cradle to Cradle® framework for health and environment. As such Tarkett's Lino exceeds European REACH regulation requirements.
- 100% recyclable - Tarkett's Lino offcuts can be fully reused as raw materials for future products or packaging through our ReStart® Programme.



RESOURCE STEWARDSHIP

You want a linoleum produced in a responsible way?
Driven by the standards of our World Class Manufacturing programme for continuous improvement of processes, we reduce our operational impact and preserve the environment.

- Pioneering the new ISO14067 product carbon footprint certification, in addition to existing ISO9001 quality, ISO14001 environment, ISO50001 energy and OHSAS 18001 safety management certification.
- 100% recycled / recirculated industrial water (closed-loop).
- Rainwater collection and re-use.
- Green House Gases (GHG) emission reduction by 44% vs 2010 (the equivalent of a 23.541 km car journey).
- Producing electricity, heating and cooling power from a single device (a gas engine) to increase energy efficiency in a profitable and sustainable way (30% self-produced energy).
- Increasing renewable energy use through photovoltaic panels, a biomass boiler and a geothermal system (internal production) and the purchase of 100% renewable electricity.

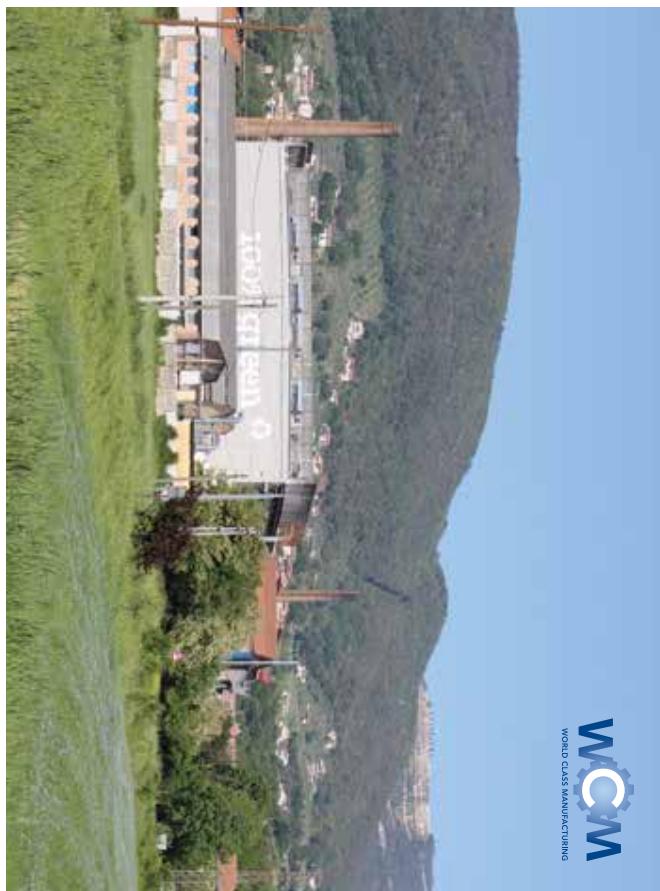



PEOPLE-FRIENDLY SPACES

You care about the comfort and well-being of users?

We create flooring designed for improved indoor air quality that respects people's health and well-being. Tarkett's Lino enhances people's everyday sensorial experience, through colours and patterns, as well as through acoustic or underfoot comfort. All of which offer key advantages for schools, universities and hospitals.

- Research on how to best use colour and design to enhance aesthetics and ergonomics for stimulating, productive or restful environments.
- Innovation for a better sound and thermal insulation, and for improved underfoot comfort.
- Good air quality, VOC emissions (<100µg/m³) 10 times lower than the most stringent industry requirements.
- Naturally phthalate-free.



- Hardwearing and resistant, Tarkett's Lino X^{2™} surface treatment simplifies cleaning and maintenance, which means 3.7% less water usage, 8.9% less electricity and 25% less detergent*.
- Compared to linoleum without X².



REUSE

You want to play a role in ensuring a sustainable future?

We recycle at every step of the linoleum life cycle to upcycle waste and avoid landfill. We believe products should no longer have an end of life, but an end of use to then become resources for new products. Join us in the transformation towards a circular economy.

- Tarkett's Lino is 100% recyclable, from linoleum paste and surplus jute to powders.
- By recycling 1,600 tons of linoleum annually, we reduce our need for virgin raw materials.
- Our dedicated ReStart[®] recycling programme helps customers worldwide to collect and recycle installation offcuts.
- Our objective is 0% production waste by 2020 at Narmi.



Natural, versatile and sustainable, combining tradition, craftsmanship and innovation, Tarkett's Lino offers a fresh approach to the flooring needs of today and lifestyles of tomorrow.


FLOORCRAFT AND CUSTOMISATION SERVICE
For projects looking for a more individually customised design or colour, Tarkett offers a dedicated customisation service, ready to translate your ideas into unique flooring concepts.

OPEN TO A WORLD OF COLOUR

Drawing on on-going trends analysis and colour expertise, our ranges have been developed through consultation with architects across the world at every design phase. It has enabled Tarkett to perfect the right combination of colour, balance and structure for each design concept, meeting the ambitions of any architectural project.

To anticipate how needs will change, our design teams explore emerging architectural, cultural and lifestyle trends. We share these insights in our Tarkett Observer studies that identify key orientations to enhance interior building design and user experience in healthcare, education and retail environments of the future.

Tarkett's Lino now comes in a complete solution that goes through the ages and is more contemporary than ever. From the floor to the wall, whether you need a compact, acoustic or conductive option, a variety of design patterns and colours opens up to you.

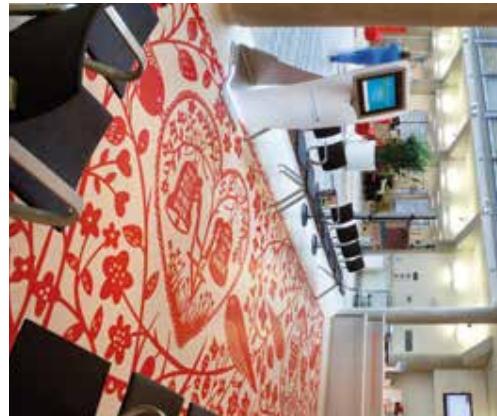

OUR DESIGN ORIENTATIONS

Human Inside

- Creating social cohesion for a stimulating environment that improves focus and concentration.
- An environment that plays with graphic and colour codes to give meaning to each area.

Interactive Space

- Flexible and modular design to change perceptions of learning and stimulate creativity.
- Tonic and bright colour range with materials and patterns that bring the present into the future.

Green value

- Creating a first contact with eco-responsibility and integrating environmental awareness.
- Greens, browns and neutrals and patterns that suggest nature. Re-usability and recyclability.

DESIGN - OUR RANGE

Veneto

A collection of strong and subtle marbled designs in soft or intense pattern variations for a timeless effect. All shades of the colour spectrum in a combination of neutral and contemporary accents.

Grands Classiques: a selection of 20 timeless colours amongst the Veneto that we guarantee in production until 2033. They are available in different levels of traffic resistance with xfew[®] surface treatment, and can be matched with our range of multicolour welding rods for a perfect finish. This includes Sicuro R10 anti-slip and Essenza non-permanent surface finish. Grands Classiques designs are also available in acoustic option: Silencio - 18dB.

Style Emme and Style Elle

A design range where the natural patterned beauty of linoleum meets modern style. It's a subtle mix between contemporary colours and light marbled surfaces.

- **STYLE EMME:** a subtle marbling for refined and sophisticated styling.
- **STYLE ELLE:** a discrete directional linear design.



Etrusco

A contemporary linoleum range featuring sixteen deep and radiant colours.

Thanks to its deep colours and plain design, Etrusco can be easily combined with any other type of pattern or used alone, for great design effects.



Besides its technical performances, one of the greatest strengths of Tarkett's Lino is its rich colour palette. All colours of the chromatic circle are present in the range, offering unlimited options for mix and match, and fitting every ambience.

Trentino

A collection mixing modernity and tradition, Trentino offers a subtle semi-directional pattern, made of 3 colours: a main marbled colour, with two contrasting tones, giving the design depth.



Originale

The only linoleum Cradle to Cradle[®] Gold certified.

The real nature of Tarkett's lino: authenticity, product essence, sustainability. This new collection features 2 striking designs, Minerale and Vegetale, where vegetal pigments give authentic colours.

- **MINERALE:** a marbled soft design with a warm linoleum effect.
- **VEGETALE:** a linear design close to the plant aspects, like leaf fibres.



The only linoleum approved for use on walls and featuring Bs2-d0 fire certification, LinoWall opens up a world of co-ordinated design possibilities. Three pastel colours have been specially chosen to complement the palette of our floor collection, while three neutral shades provide a direct match between wall and floor.

LinoWall

The only linoleum approved for use on walls and featuring Bs2-d0 fire certification, LinoWall opens up a world of co-ordinated design possibilities. Three pastel colours have been specially chosen to complement the palette of our floor collection, while three neutral shades provide a direct match between wall and floor.



LINOLEUM xf²











Our fresh, distinctive Linoleum collection blends design and colour to create contemporary looks that are right-on-trend, with the accessories you need for a perfect finish. The range consists of the Veneto, Style Emme, Style Emma and Etrusco designs to which we've added two newcomers, Trentino - a subtle pattern whose two contrasting tones give the design depth - and Originate - Cradle to Cradle™ Gold level certification. And we don't stop at floor-level. Our new wall-approved LinoWall™ is another first, it offers co-ordinated interiors from the ground up.

All of our linoleum flooring and wall covering come with the xf² surface-treatment technology for excellent resistance and easy maintenance, ideal in heavy traffic environments. The Veneto and the Original ranges are also available with a factory-applied, non-permanent finish called Essenza.

★ 20 Grands Classiques

Linoleum Flooring

TECHNICAL SOLUTIONS		ACOUSTIC		COMPACT	
2mm xf ²	2	Veneto		14871	---
2.5		Veneto		14872	---
2.5		Style Emme		14825	---
2.5mm xf ²	2.5	Style Emme		14835	---
2.5		Etrusco		14877	---
2.5		Trentino		14502	---
2.5mm	E	Veneto		1805	---
2.5mm	E	Originate Minrale		14042	---
Essenza	E	Original Vegetable		14032	---
3.2mm xf ²	3.2	Veneto		14873	---
5		Veneto Silencio		14892	---
5		Style Emme Silencio		14783	---
3.8mm xf ²	5	Style Emme Silencio		14782	---
5		Etrusco Silencio		14894	---
5		Trentino Silencio		14724	---
4.4mm xf ²	4C	Veneto Acoustic Cork		14881	---
50		Linoleum Sanc'is Dissipative		14995	---
C		Linoleum Conductive		14991	---
R10		Veneto Studio		1863	---
B ₁		Etrusco B ₁		14078	---
2.5mm xf ²	B ₁	StyleEmme B ₁		14088	---
B ₁		StyleEmme B ₁		14098	---
B ₁		Trentino B ₁		14128	---

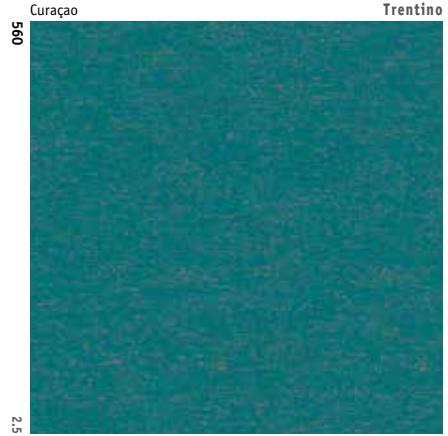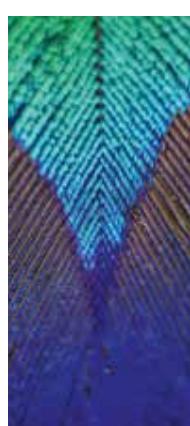

NCS S 4010-R90B
Blue Purple

NCS S 5040-R90B

Horizon

663

* E-2/2.5/3.2

762

2.5



2 mm xf²

LinoWall

14010 ---

Colour code

on request

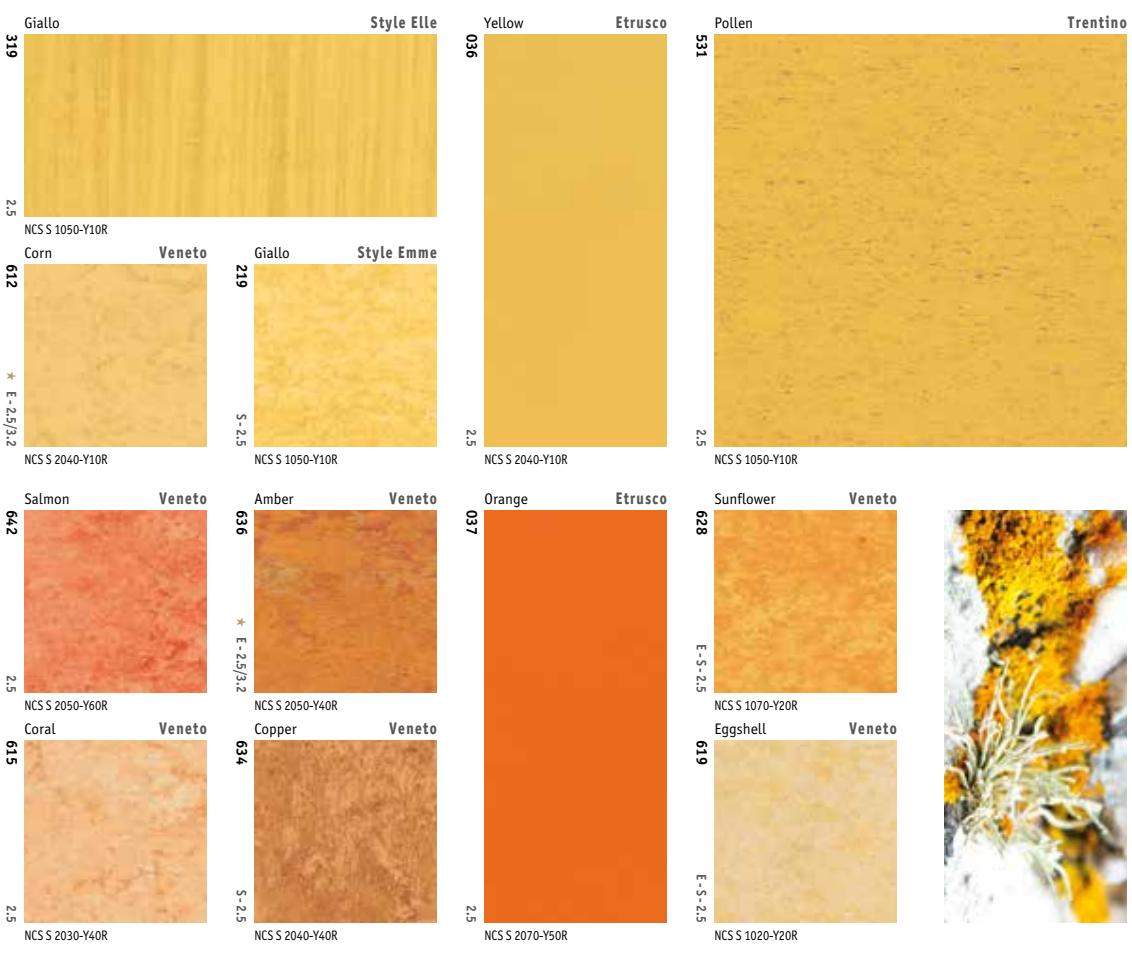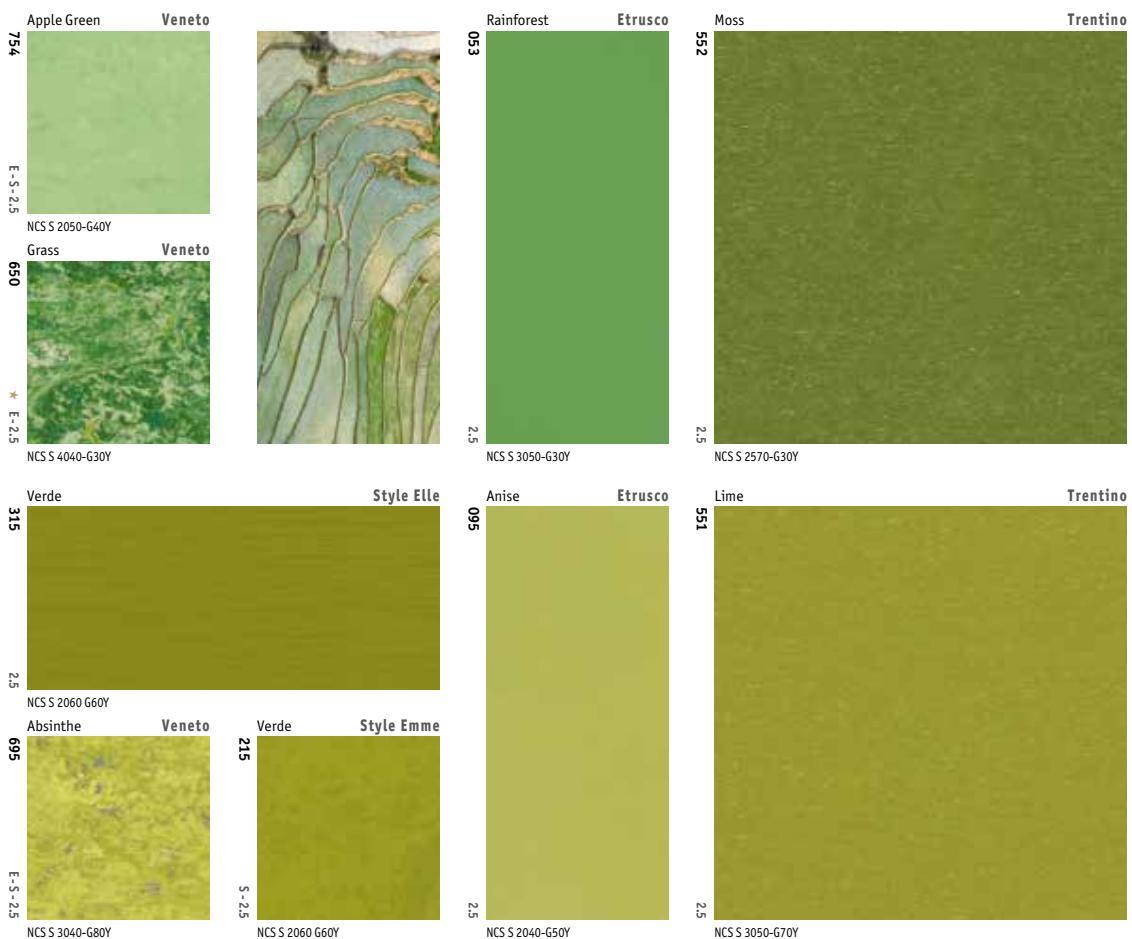



LINOUM xf²

Terracotta 641	Veneto	Jaipur Pink 221	Style Emme 2.5	Macaw 044	Etrusco	Grapefruit 530	Trentino
NCS S 2070-Y80R Raspberry	Veneto	NCS S 1060-Y80R Cranberry	Style Emme	NCS S 3060-Y80R	Etrusco	NCS S 1060-Y80R	Trentino
945	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Crimson 740	Veneto	Red 041	Etrusco	Red Berlin 094	Etrusco		Chocolate 632
NCS S 3060-R Carmine	Veneto	NCS S 2070-Y90R		NCS S 6030-Y90R			NCS S 7005-Y80R Tiger Eye
645	2.5	2.5		2.5			524
NCS S 1580-Y90R							NCS S 7020-Y40R

LINOWALL

The only linoleum approved for use on walls and featuring BS2-02 fire certification, Linowall xF opens up a world of co-ordinated design possibilities.

Three pastel colours have been specifically chosen to complement the palette of our floor collection, while three more neutral shades provide a direct match between wall and floor.


Our Linowall also comes with xf² surface-treatment technology.





ORIGINAL

Original reflects the desire for a pure, authentic look that's closer to nature. 100% natural in its composition and Cradle to Cradle[™] Gold-certified, this is our most sustainable, nature-friendly linoleum flooring to date.

The range includes two new designs, both made using natural pigments derived from renewable organic sources like charcoal and walnut, and available with a factory-applied, non-permanent finish called Essenza. Vegetale features a gently marbled linear design resembling plant fibres, enhanced by natural colours.

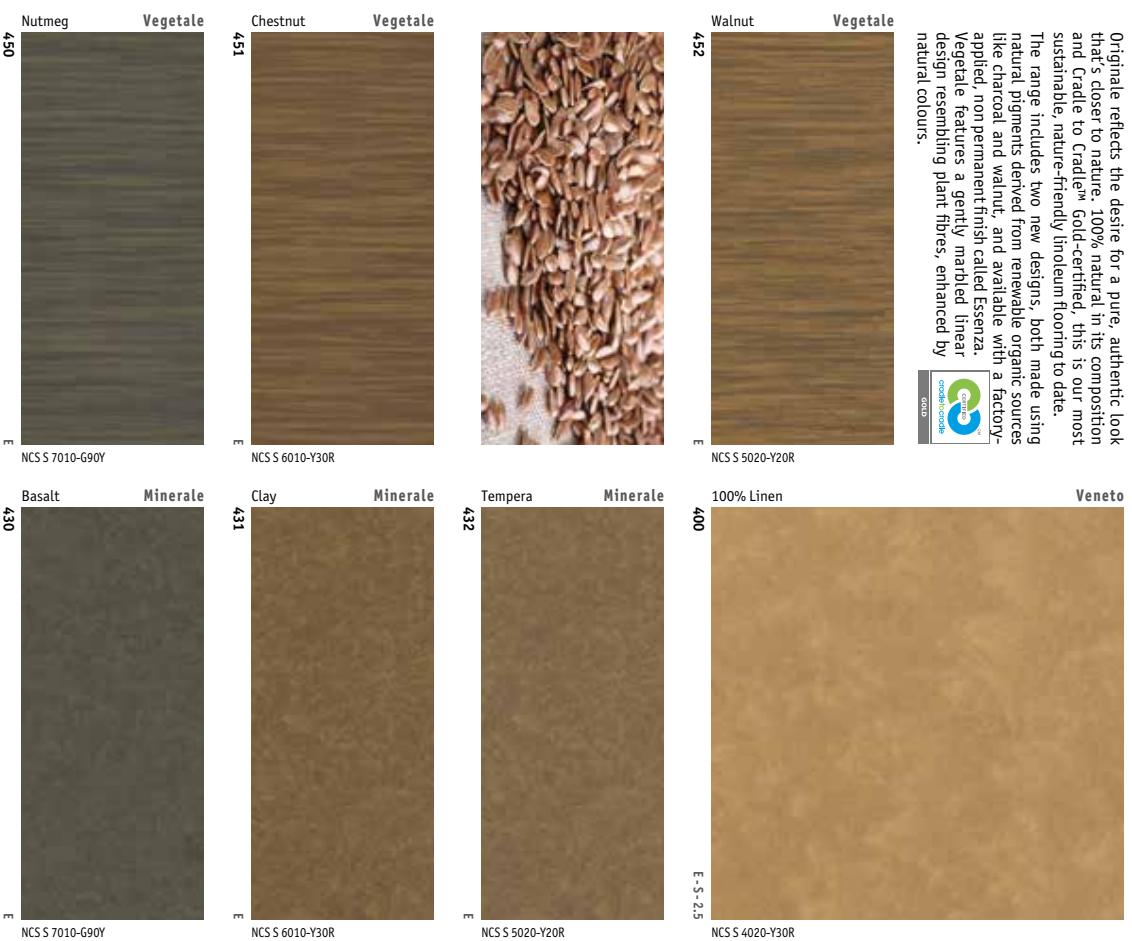

LINOLOMUM xf²

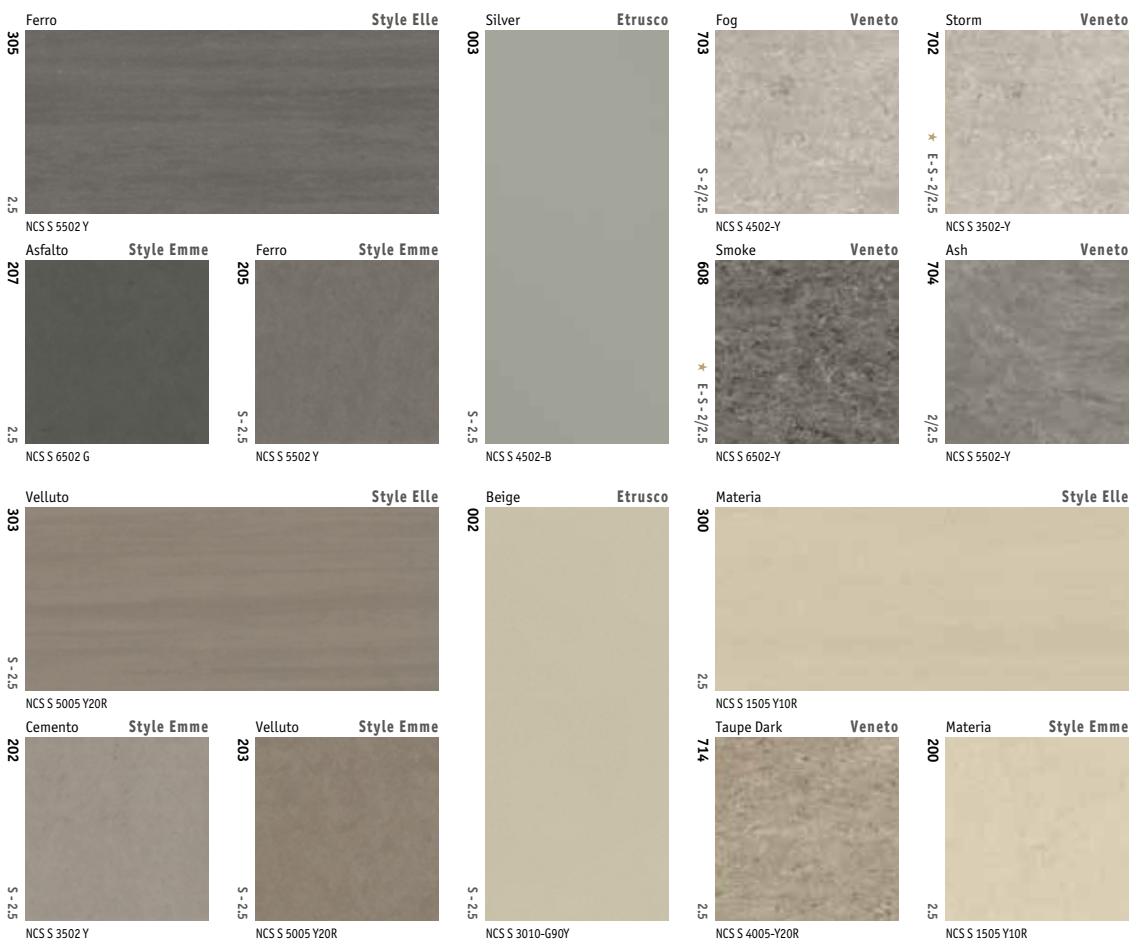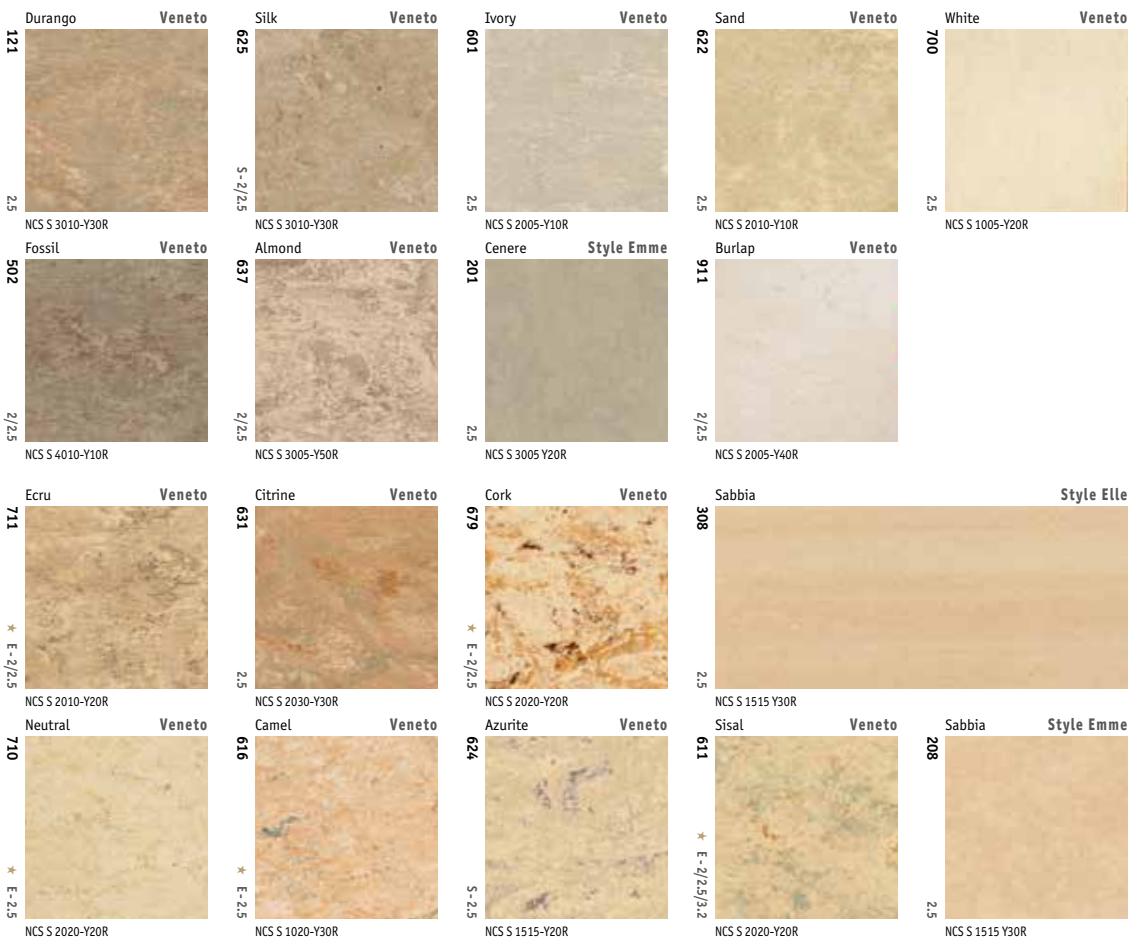

 LINOLEUM xf²



 LINOLEUM xf²



A HARD-WEARING SOLUTION OVER ITS LIFETIME

For 150 years, linoleum flooring has been appreciated for its natural beauty, comfort, durability and versatility in most interior environments. Tarkett was an early innovator in surface treatments, with the xf^{2™} technology added to its linoleum, to improve resistance and simplify maintenance for significant cost savings in daily cleaning and care.





xf^{2™} for excellent performance

xf^{2™} increases resistance for even longer durability and for a reduced maintenance, leading to a highly cost-effective flooring.

- Micro-reinforced polyurethane UV treatment seals and hardens the surface to make it more resistant to dirt and daily wear and tear.
- A smooth matt appearance prevents accumulation of dirt or stains.
- No need for polish, stripping and polymer waxing over the lifetime of the surface, providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture appropriate leg coverings and daily surveillance.
- Excellent resistance to abrasion, stains and chemicals.

Superior resistance to abrasion

No other linoleum is so resistant to abrasion. We have conducted extensive internal and external laboratory testing to evaluate the resistance of xf^{2™} linoleum to abrasion over time. With the help of an electron microscope and 3D surface profilometer we are now able to see, magnified, the proof of the unbeatable resistance of xf^{2™}. Tests are done on Competitors A, B and Tarkett samples, before and after dry abrasion by a rotation tumbler machine equipped with black pads. All linoleum are PU UV coated, following producers declarations. After 30 minutes, the test machine began to degrade the finish of Competitors' Samples A and B. Tarkett's test continued for one hour without visible finish degradation.



After abrasion competitor A and B are destroyed when Tarkett xf^{2™} is still intact.

NEW improved xf^{2™} WELDING RODS

The new formula developed by Tarkett - both multi-colour and traditional uni-colour - offers a very easy installation and exceptional resistance to all kinds of soiling and abrasion for an effective cleaning.

Naturally inhibiting bacterial growth

Flooring contributes to ensuring hygienic environments in public buildings - from schools to hospitals where stain resistance to medical chemicals is mandatory for flooring materials.

Independent testing by third party prove that Tarkett's Lino has naturally bactericidal properties against the most common bacteria such as E-coli and MRSA.

Reduced life cycle cost for Linoleum xf^{2™}

The cost of the initial investment and installation normally represents just a small part of the flooring's total life cycle cost. The rest is cleaning and maintenance. As the Linoleum xf^{2™} doesn't require first surface treatment after installation, neither regular wax or polish maintenance during its lifetime, consumption of water and detergent decrease significantly and give Linoleum xf^{2™} a very favorable life cycle cost.

Compared with Linoleum flooring treated with a non-permanent acrylic finish, payback on the extra investment could come within 2 months*.

For more information, please contact your Tarkett representative.

Simplifying cleaning and maintenance

The reinforced surface of linoleum xf^{2™} means no polish, stripping and polymer waxing over the lifetime of the product; providing soil barriers are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture appropriate leg coverings and daily surveillance. As a result, it requires less frequent, less intense cleaning and maintenance and reduces the use of water, energy and chemical detergents for a better environmental footprint.



*Case study: school of 2000m² (class rooms 1200m² and corridors 700m²), comparison between untreated Linoleum and Linoleum xf^{2™}. For 20 years life time, respecting cleaning and maintenance recommendations: entrance matting, regular cleaning and furniture appropriate leg coverings and daily surveillance.

Savings:
 ■ 3.7% of water saved
 ■ 25% less detergent
 ■ 8.9% less electricity power
 ■ 3.8% less manpower

CLEANING AND MAINTENANCE

CLEANING AND MAINTENANCE : NO POLISH, NO WAX*

Modern day-room cleaning aims to reduce wet cleaning procedures and replace them with drier cleaning techniques, like the use of centrally laundered pre-impregnated mops and the wide application of appropriate machines. This makes work more effective and easier for the cleaning staff, and minimizes environmental impact. Less cleaning chemicals and less fresh water are used.

1 > Initial site cleaning



After installation, initial site cleaning is required: vacuum, sweep or damp mop the area to remove building dust and loose dirt. A combined scrubber/dryer with brushes or red pads cleans large areas very effectively. Use detergent with a low pH (3-5).

Xf[®] will not be removed by any cleaning operation.

2 > Daily and regular cleaning



Remove dust and dirt with yarn or microfiber mops or disposable mops, dry or impregnated or vacuum the floor.

Use a mop dampened with water or detergent solution to remove spots. It is essential that water does not stay on the floor or leave a film. The floor should be virtually dry after 15-20 seconds. If required spray clean the floor with a rotary machine and red pad.

3 > Periodic cleaning



or



Combined machine

Use diluted neutral detergent. Speed low 150-250 rpm or higher. Red/brown pads are usually most suitable.

- Machine scrubbing + Wet vacuuming + Dry buffering
- Apply a cleaning solution (fairly strong, pH 10-11, after dilution) and allow to act for 5-10 min.
- Clean the floor using a heavy-duty single disc scrubbing machine (red pad).

Vacuum up the dirty water immediately.

- Rinse with clean water and allow the floor to dry.
- If necessary dry buff (red pad) to restore gloss.

Suitable speed: 500-1000 rpm.

TRAINING

We provide a range of on-demand training for distributors, installers and maintenance teams on Tarkett products, installation and maintenance techniques as well as individual installation of key products for demonstration and discussion with customers.

We can deliver these worldwide in our own training facilities, such as Narni or at customer sites. Our international technical advisers can also provide personalized training or support at the start of installation on building projects.

For more information about installation training or on-site assistance in your area, contact your Tarkett representative.

Sharp edged / not maintained furniture feet, sand, pebbles, permanent push and drive movements on the same area will damage every kind of flooring over the time.


*Providing soildarins are correctly put in place, regular maintenance is operated (daily vacuuming and mopping), furniture appropriate leg coverings and daily surveillance.



TECHNICAL SOLUTIONS

SD STATIC DISSIPATIVE xf^{2™}

A safe, sustainable flooring designed for static control near computer, electronic and telecommunications equipment in medical, manufacturing, education and industry environments. Available in rolls and cuts for raised floors.

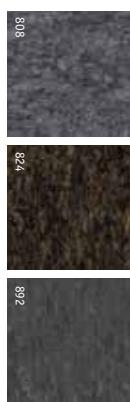

LINOLEUM Bfl xf^{2™} - 2.5mm

2.5 mm linoleum Bfl fire rating, without flame retardants. Bfl by its natural ingredients. Ideal for evacuation routes. Product available on demand in rolls and 608x608 mm pre-cuts for raised floors, in all designs and colours.

SILENZIO xf^{2™} - 18dB

2.5 mm linoleum with jute backing and recycled polyurethane foam underlayer, giving an excellent sound reduction of 18 dB. Available in rolls and cuts for raised floors.

CONDUCTIVE xf^{2™} - THE ONLY CONDUCTIVE LINOLEUM

A safe and sustainable flooring designed for a stable and reliable conductive control. The natural solution for education, healthcare and office environments, especially for areas like server and computer rooms, laboratory and electronic equipment in operating theatres. Available in rolls and cuts for raised floors.

VENETO ESSENZA - 2.5mm

4.4 mm

2.5 mm linoleum and natural Elafono (cork underlayer) giving excellent sound reduction of 15dB. Product available on demand, in rolls and 608x608 mm pre-cuts for raised floors, in all 60 Veneto colours.

ELAFONO

2.0 mm traditional, natural, 100% natural cork underlay installed in combination with any compact Tarkett linoleum to get added sound reduction (up to 15dB, depending on the product). Available in rolls.

Cuts 608 x 608 mm

Cuts linoleum ready for use. Designed for raised floors manufacturers, they are available in all colors, designs and technical options.



Lino SOS



Lino SIS



Lino SIS outer angle

ACCESSORIES

Linoleum set-on skirtings (SOS)

- Available in: 6/8/10 cm high x 220 cm long

Linoleum set-in skirtings (SIS)

- Available in: 6/8/10 cm high x 240 cm long
- SIS outer corner available in: 6/8/10 cm high x 10 cm width (size of the corner 13x13 cm)



SPORT APPLICATION

Tarkett's Lino is also suitable for sport application. Have a look at our selection of the Linosport range at www.tarkett-sports.com

DISCLAIMER ON YELLOWING EFFECT

Once unpacked and as a result of the natural production process, linoleum sometimes comes with a slightly yellow surface film. The yellow tint will disappear progressively with exposure to light; 24 hour exposure to bright daylight will make it disappear completely. The phenomenon is reversible and the yellow film might reappear in areas covered by furniture or other objects. It will of course disappear again once exposed to daylight.

RANGE OVERVIEW

	Colour name	Ref	Veneto 2,0 mm xf ²	Veneto 2,5 mm xf ²	Veneto 3,2 mm xf ²	Veneto Silenzio xf ² , 3,8 mm	Veneto Essenza 2,5 mm (acrylic)	Veneto xf ² 8s ON REQUEST	Veneto Acoustic Cork xf ² 15dB ON REQUEST	Veneto Sicuro xf ² R10 2,5 mm ON REQUEST	NCS code LINOLEUM	RAL code LINOLEUM	Uni Color Welding Rod 4,4mm (for compact linoleum)	Uni Color Welding Rod 4,4mm (for acoustic linoleum)	NCS code Uni Color Welding Rod	NCS code MultiColor Welding Rod	L xf ²	LRV of a surface** (xf ²)
Duango	121	1487221	1487240	1487240	1487240	1487240	14889121	1488121	1883121	S010-30R	1001	1751121	1487240	1487240	1487240	1487240	46,96	18%
100% lnen	490	1487250	1487250	1487250	1487250	1487250	14889120	1488120	1883120	S020-30R	1011	1751460	1487250	1487250	1487250	1487250	56,52	24%
Festai	502	14871502	14871502	14871502	14871502	14871502	14889120	1488120	1883120	S010-10R	7032	1751592	14871502	14871502	14871502	14871502	56,52	24%
Tiger eye	524	14872524	14872524	14872524	14872524	14872524	14889124	1488124	1883124	S020-40R	8006	1751524	14872524	14872524	14872524	14872524	41,09	12%
Ivory	601	14872601	14872601	14872601	14872601	14872601	14889124	1488124	1883124	S020-10R	9002	1751601	14872601	14872601	14872601	14872601	74,8	48%
Pebble	604	14871504	14871504	14871504	14871504	14871504	14889124	1488124	1883124	S020-50R	4087	1751049	14871504	14871504	14871504	14871504	53	19%
*Smoke	608	14872608	14872608	14872608	14872608	14872608	14889128	1488128	1883128	S020-10R	7033	1751205	14872608	14872608	14872608	14872608	53	19%
*Circolal	610	14871510	14871510	14871510	14871510	14871510	14889128	1488128	1883128	S020-50R	1011	1751460	14871510	14871510	14871510	14871510	46,96	18%
*Sisal	611	14871511	14871511	14871511	14871511	14871511	14889128	1488128	1883128	S010-10R	7032	1751592	14871511	14871511	14871511	14871511	56,52	24%
*Coral	612	14872612	14872612	14872612	14872612	14872612	14889128	1488128	1883128	S020-10R	9001	1751611	14872612	14872612	14872612	14872612	41,09	12%
*Tunel	616	14872616	14872616	14872616	14872616	14872616	14889128	1488128	1883128	S020-10R	9002	1751615	14872616	14872616	14872616	14872616	74,8	48%
Eggshell	619	14872619	14872619	14872619	14872619	14872619	14889129	1488129	1883129	S020-10R	9003	1751608	14872619	14872619	14872619	14872619	53	19%
Sand	622	14872622	14872622	14872622	14872622	14872622	14889129	1488129	1883129	S020-10R	1015	1751098	14872622	14872622	14872622	14872622	33,8	8%
Antrite	624	14872624	14872624	14872624	14872624	14872624	14889129	1488129	1883129	S020-10R	2001	1751619	14872624	14872624	14872624	14872624	41,09	12%
Silk	625	14871625	14871625	14871625	14871625	14871625	14889125	1488125	1883125	S020-10R	9002	1751219	14871625	14871625	14871625	14871625	74,8	48%
Sunflower	628	14872628	14872628	14872628	14872628	14872628	14889125	1488125	1883125	S020-10R	1017	1751615	14872628	14872628	14872628	14872628	53	19%
Girafe	631	14872631	14872631	14872631	14872631	14872631	14889131	1488131	1883131	S020-10R	2001	1751611	14872631	14872631	14872631	14872631	69	39%
Chocolate	632	14872632	14872632	14872632	14872632	14872632	14889132	1488132	1883132	S020-10R	1017	1751611	14872632	14872632	14872632	14872632	53	19%
Copper	634	14872634	14872634	14872634	14872634	14872634	14889134	1488134	1883134	S020-10R	1014	1751619	14872634	14872634	14872634	14872634	37,8	8%
*Graas	650	14872650	14872650	14872650	14872650	14872650	14889136	1488136	1883136	S020-10R	1017	1751625	14872650	14872650	14872650	14872650	53	19%
*Hinter	656	14872656	14872656	14872656	14872656	14872656	14889136	1488136	1883136	S020-10R	1017	1751625	14872656	14872656	14872656	14872656	53	19%
Almond	657	14871657	14871657	14871657	14871657	14871657	14889137	1488137	1883137	S020-10R	1017	1751625	14871657	14871657	14871657	14871657	53	19%
*Fernkota	657	14871657	14871657	14871657	14871657	14871657	14889137	1488137	1883137	S020-10R	1017	1751625	14871657	14871657	14871657	14871657	53	19%
Horizon	663	14871663	14871663	14871663	14871663	14871663	14889137	1488137	1883137	S020-10R	1017	1751625	14871663	14871663	14871663	14871663	53	19%
Oean	665	14872662	14872662	14872662	14872662	14872662	14889137	1488137	1883137	S020-10R	1017	1751625	14872662	14872662	14872662	14872662	53	19%
Lavender	670	14872670	14872670	14872670	14872670	14872670	14889137	1488137	1883137	S020-10R	1017	1751625	14872670	14872670	14872670	14872670	53	19%
Perim	671	14872671	14872671	14872671	14872671	14872671	14889137	1488137	1883137	S020-10R	1017	1751625	14872671	14872671	14872671	14872671	53	19%
Aluminum	672	14871672	14871672	14871672	14871672	14871672	14889137	1488137	1883137	S020-10R	1017	1751625	14871672	14871672	14871672	14871672	53	19%
Concrete	686	14872686	14872686	14872686	14872686	14872686	14889138	1488138	1883138	S020-10R	1017	1751625	14872686	14872686	14872686	14872686	53	19%
May	688	14872688	14872688	14872688	14872688	14872688	14889138	1488138	1883138	S020-10R	1017	1751625	14872688	14872688	14872688	14872688	53	19%
Stone	692	14872692	14872692	14872692	14872692	14872692	14889139	1488139	1883139	S020-10R	1017	1751625	14872692	14872692	14872692	14872692	53	19%
Abstrakt	695	14872695	14872695	14872695	14872695	14872695	14889139	1488139	1883139	S020-10R	1017	1751625	14872695	14872695	14872695	14872695	53	19%
White	700	14872700	14872700	14872700	14872700	14872700	14889140	1488140	1883140	S020-10R	1017	1751625	14872700	14872700	14872700	14872700	53	19%
*Storm	702	14872702	14872702	14872702	14872702	14872702	14889140	1488140	1883140	S020-10R	1017	1751625	14872702	14872702	14872702	14872702	53	19%
Fog	703	14872703	14872703	14872703	14872703	14872703	14889140	1488140	1883140	S020-10R	1017	1751625	14872703	14872703	14872703	14872703	53	19%
Ash	704	14872704	14872704	14872704	14872704	14872704	14889140	1488140	1883140	S020-10R	1017	1751625	14872704	14872704	14872704	14872704	53	19%
Hperial	707	14872711	14872711	14872711	14872711	14872711	14889141	1488141	1883141	S020-10R	1017	1751625	14872711	14872711	14872711	14872711	53	19%
Bule purple	702	14872722	14872722	14872722	14872722	14872722	14889142	1488142	1883142	S020-10R	1017	1751625	14872722	14872722	14872722	14872722	53	19%
Hightech	764	14872764	14872764	14872764	14872764	14872764	14889142	1488142	1883142	S020-10R	1017	1751625	14872764	14872764	14872764	14872764	53	19%
Gagenta	767	14872767	14872767	14872767	14872767	14872767	14889142	1488142	1883142	S020-10R	1017	1751625	14872767	14872767	14872767	14872767	53	19%
Grey	793	14871793	14871793	14871793	14871793	14871793	14889143	1488143	1883143	S020-10R	1017	1751625	14871793	14871793	14871793	14871793	53	19%
Giggle	906	14872906	14872906	14872906	14872906	14872906	14889144	1488144	1883144	S020-10R	1017	1751625	14872906	14872906	14872906	14872906	53	19%
Butap	911	14871911	14871911	14871911	14871911	14871911	14889145	1488145	1883145	S020-10R	1017	1751625	14871911	14871911	14871911	14871911	53	19%
Night Owl	917	14872917	14872917	14872917	14872917	14872917	14889145	1488145	1883145	S020-10R	1017	1751625	14872917	14872917	14872917	14872917	53	19%
Raspberry	945	14872945	14872945	14872945	14872945	14872945	14889145	1488145	1883145	S020-10R	1009	1751945	14872945	14872945	14872945	14872945	40,52	12%


*On request

**P-value (m)² x (l-16)/16)
| Colour name | Ref | Veneto 2,0 mm xf² | Veneto 2,5 mm xf² | Veneto 3,2 mm xf² | Veneto Silenzio xf², 3,8 mm | Veneto Essenza 2,5 mm (acrylic) | Veneto xf² 8s 2,5 mm ON REQUEST | Veneto Acoustic Cork xf² 15dB ON REQUEST | Veneto Sicuro xf² R10 2,5 mm ON REQUEST | NCS code LINOLEUM | RAL code LINOLEUM | Uni Color Welding Rod 4,4mm (for compact linoleum) | Uni Color Welding Rod 4,4mm (for acoustic linoleum) | NCS code Uni Color Welding Rod |
<th
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |

REFERENCES




Veldhoven Gilde, Venray, The Netherlands
6000m² Veneto X-Fit™, 2.0mm, 2.5mm and 3.2mm, 2009

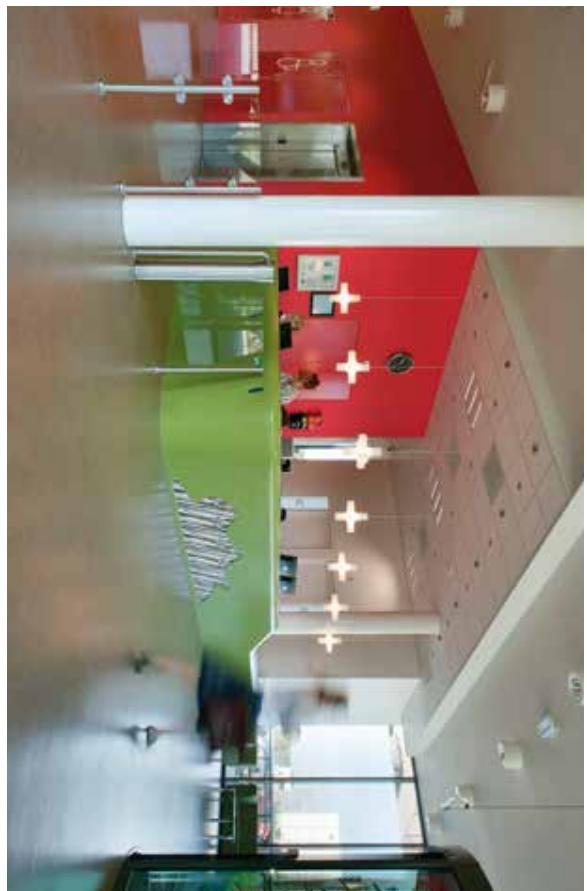

Jean-Louis Etienne School, Herblay, France
3800m² Veneto Silex x-fit™, Style Ermitage Silence x-fit™, Etusico Studio x-fit™, 2015




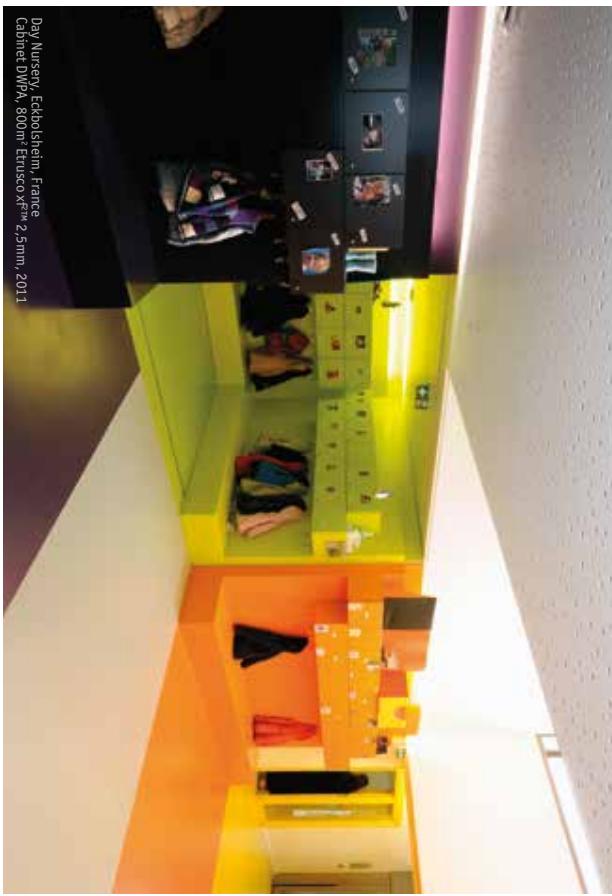

Day Nursery, Eckbolsheim, France
Cabinet DWPA, 8000m² Etrusco X® 2,5mm, 2011



Sint-Ludgerus School, Merksem, Belgium
Wolkaert, 840 m² Veneto X® 2,5mm, 2010

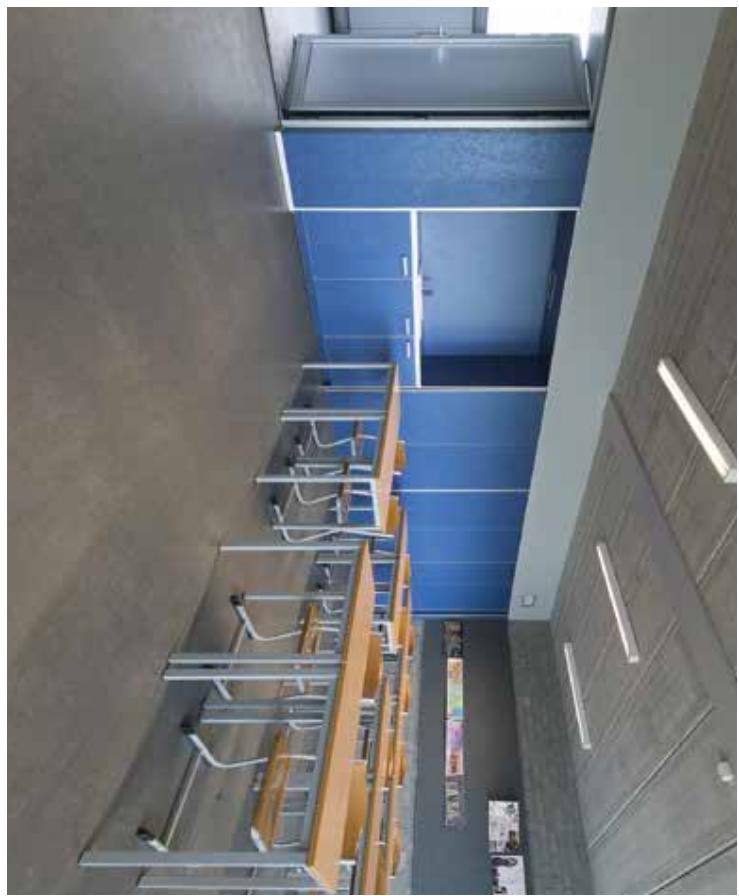

TECHNICAL DATA

SUSTAINABILITY

Tarkett was the first linoleum flooring manufacturer to be Cradle to Cradle® certified - underlining our strong commitment to



Product certifications



Conductive xir ranges)



Factory certification



All our linoleum products are eligible for LEED v4 credits. For more information:
<http://www.c2certified.org/products/registry>

■ **WESTERN EUROPE:** **Austria:** Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ **Belgium:** Tarkett Belux Sprl – Tel. +32 16 35 98 80 ■ **Denmark:** Tarkett A/S – Tel. +45 43 90 60 11 ■ **Finland:** Tarkett Oy – Tel. +358 9 4257 9000 ■ **France:** Tarkett SAS – Tel. +33 1 41 20 42 49 ■ **Germany:** Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ **Greece:** Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ **Italy:** Tarkett S.p.A. – Tel. +39 0744 7551 ■ **Luxembourg:** Tarkett GDL SA – Tel. +352 949 211 8804 ■ **Netherlands:** Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ■ **Norway:** Tarkett AS – Tel. +47 32 20 92 00 ■ **Portugal:** Tarkett SA – Tel. +351 21 427 64 20 ■ **Spain:** Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ **Sweden:** Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ **Turkey:** Tarkett Aspen – Tel. +90 212 213 65 80 ■ **United Kingdom:** Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE:** **Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ **Hungary:** Tarkett France SAS – Tel. +36 1 437 8150 ■ **Poland:** Tarkett Polska Sp. z o. o. – Tel. +48 22 16 09 231 ■ **Russian Federation:** ZAO Tarkett RUS – Tel. +7 495 775 3737 ■ **Slovakia:** Tarkett France SAS, org.zlozka – Tel. +421 248 291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel: +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** **Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** **Tarkett International:** Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** **Tarkett Middle East:** Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +972 3 920 0000 ■ **NORTH AMERICA:** **USA:** Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** **Brazil:** Tarkett – Tel. 55 11 3954 7108 ■ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela:** Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ **Mexico / Central America:** Tarkett Latam Mexico – Tel. +55 11 98410 9310

CUSTOMS TARIFF : 482050000000F



Tarkett

www.professionals.tarkett.com