




## Shod and barefoot suitable for wet and dry areas


- ▣ Sustainable slip resistance throughout the product life
- ▣ Safe T. Clean PUR reinforced surface for improved stain resistance and ease of maintenance
- ▣ Extremely low VOCs contributing to better interior air quality
- ▣ 2mm wear layer for extreme durability

HOMOGENEOUS  
COMPACT VINYL


# Primo Safe. T




790 Light pure grey  
[weld rod 1290283]

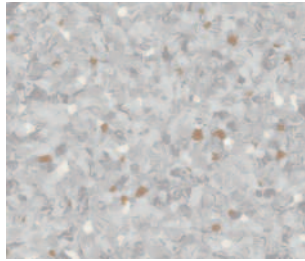


791 Medium pure grey  
[weld rod 1290284]

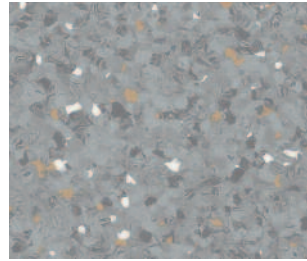


792 Medium dark pure grey  
[weld rod 1290285]

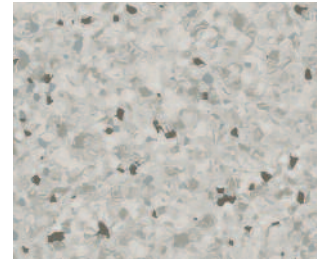

793 Light warm grey  
[weld rod 1290286]

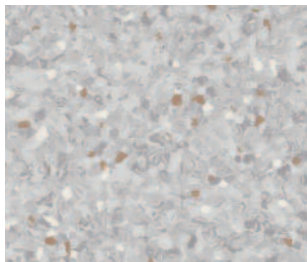


794 Medium cool grey  
[weld rod 1290287]

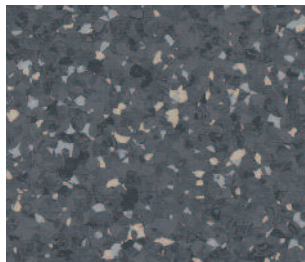


795 Dark cool grey  
[weld rod 1290288]




796 Light cool beige  
[weld rod 1290289]

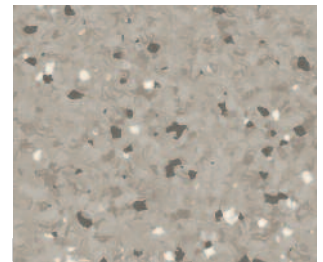


797 Medium cool beige  
[weld rod 1290290]

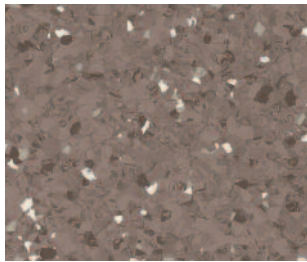


798 Dark cool beige  
[weld rod 1290291]

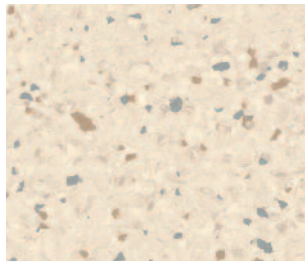


799 Light beige  
[weld rod 1290292]

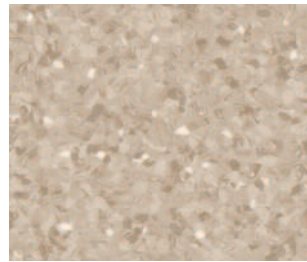


800 Medium warm beige  
[weld rod 1290293]

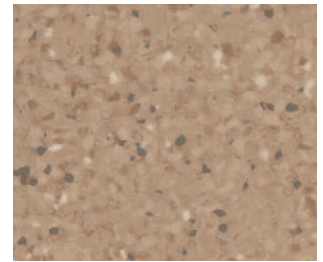


801 Dark warm beige  
[weld rod 1290294]

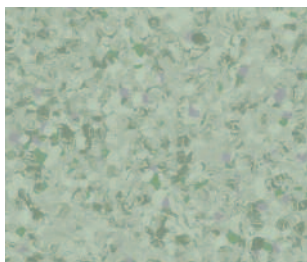


802 Light green  
[weld rod 1290295]

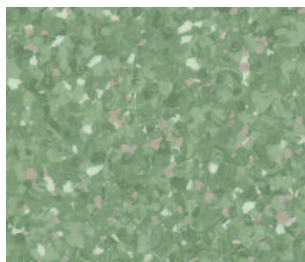


803 Medium green  
[weld rod 1290296]

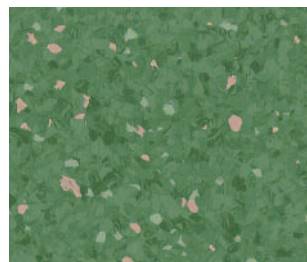


804 Dark green  
[weld rod 1290297]

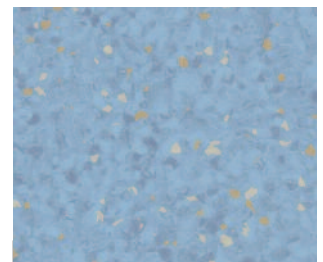

805 Light blue  
[weld rod 1290298]

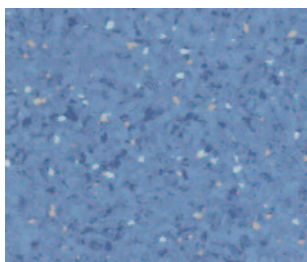

806 Medium blue  
[weld rod 1290299]

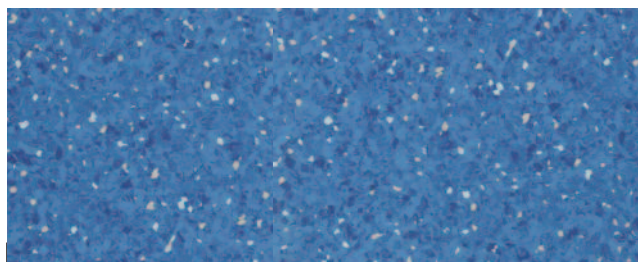

807 Dark blue  
[weld rod 1290300]



HOMOGENEOUS  
COMPACT VINYL

# Primo Safe. T

## Specification

Primo Safe. T is a homogeneous vinyl safety floorcovering suitable for use in shod and barefoot areas. Available with a choice of plain or multicolour welding rods. Product Standard: EN 13845



### Tarkett's commitments to VOC\* emissions

Currently, all floorings that Tarkett manufactures have VOC emissions of less than 100µg/m<sup>3</sup> (TVOC after 28 days) contributing to better interior air quality. This makes Tarkett an industry reference for VOC reduction with floorings that have 10 times less VOC emissions than current European standards. Our commitment to better air quality in buildings and homes is a key part of our new Balanced Choice Tag.

It gives information about the content of our products and how they contribute to sustainable development enabling customers to make their balanced choice.

\* VOC: Volatile Organic Compound

Certification & Classification	Standards	Primo Safe. T
Type of floorcovering	EN 13845	PVC Floorcovering with particle enhanced slip resistance
Classification	EN ISO 10874 (EN 685) EN 13845	Commercial 34 Industrial 43 Esf Shod Esb Barefoot
Technical Characteristics	Standards	Primo Safe. T
Total thickness	EN ISO 24346 (EN 428)	2.0mm
Wear layer thickness	EN ISO 24340 (EN 429)	2.0mm
Total weight	EN ISO 23997 (EN 430)	3000g/m <sup>2</sup>
Form of delivery	EN ISO 24341 (EN 426)	Rolls: 23lm x 2m art no. 21013 _ _ _ 3 digit colour code
Technical Performances	Standards	Primo Safe. T
PUR reinforcement		SAFE. T CLEAN
Abrasion group	EN 660: Part 2	Group P
Residual indentation	EN ISO 24343-1 (EN 433)	Approx 0.03mm
Castor chair test	EN ISO 4918 (EN 425)	No damage
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.40%
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Bfl s1 on cement ≥ 8 kW/m <sup>2</sup> Pass
Slip resistance	TRRL Pendulum 4S (Wet) Surface Roughness DIN 51097 EN 13893 DIN 51130	>36 >20µm B ≥ 0.3 R10
Electrostatic properties	EN 1815	< 2 kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987 (EN 423)	Good resistance
Thermal resistance	DIN 52612	0.01 m <sup>2</sup> K/W
Underfloor heating		Suitable - Max 27°C
Colours		18

For more information visit [www.tarkett.co.uk](http://www.tarkett.co.uk).

The above information is subject to modifications for the benefit of further improvement. (06/2014)

For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request. The values shown in the technical data are "typical values" and there may be some statistical variation away from the value shown. E&OE

Weld Rod references shown are multicolour.



Primo Safe. T 06/2014

Tarkett Limited Lenham, Maidstone, Kent ME17 2QX, United Kingdom. Tel 01622 854040 Fax 01622 854520 [www.tarkett.co.uk](http://www.tarkett.co.uk) Email: [uksales@tarkett.com](mailto:uksales@tarkett.com)



[www.tarkett.co.uk](http://www.tarkett.co.uk)