


LUXURY
VINYL
TILES

iD INSPIRATION 40

FLOOR
IS THE NEW
PLAYGROUND



THE ULTIMATE
FLOORING EXPERIENCE

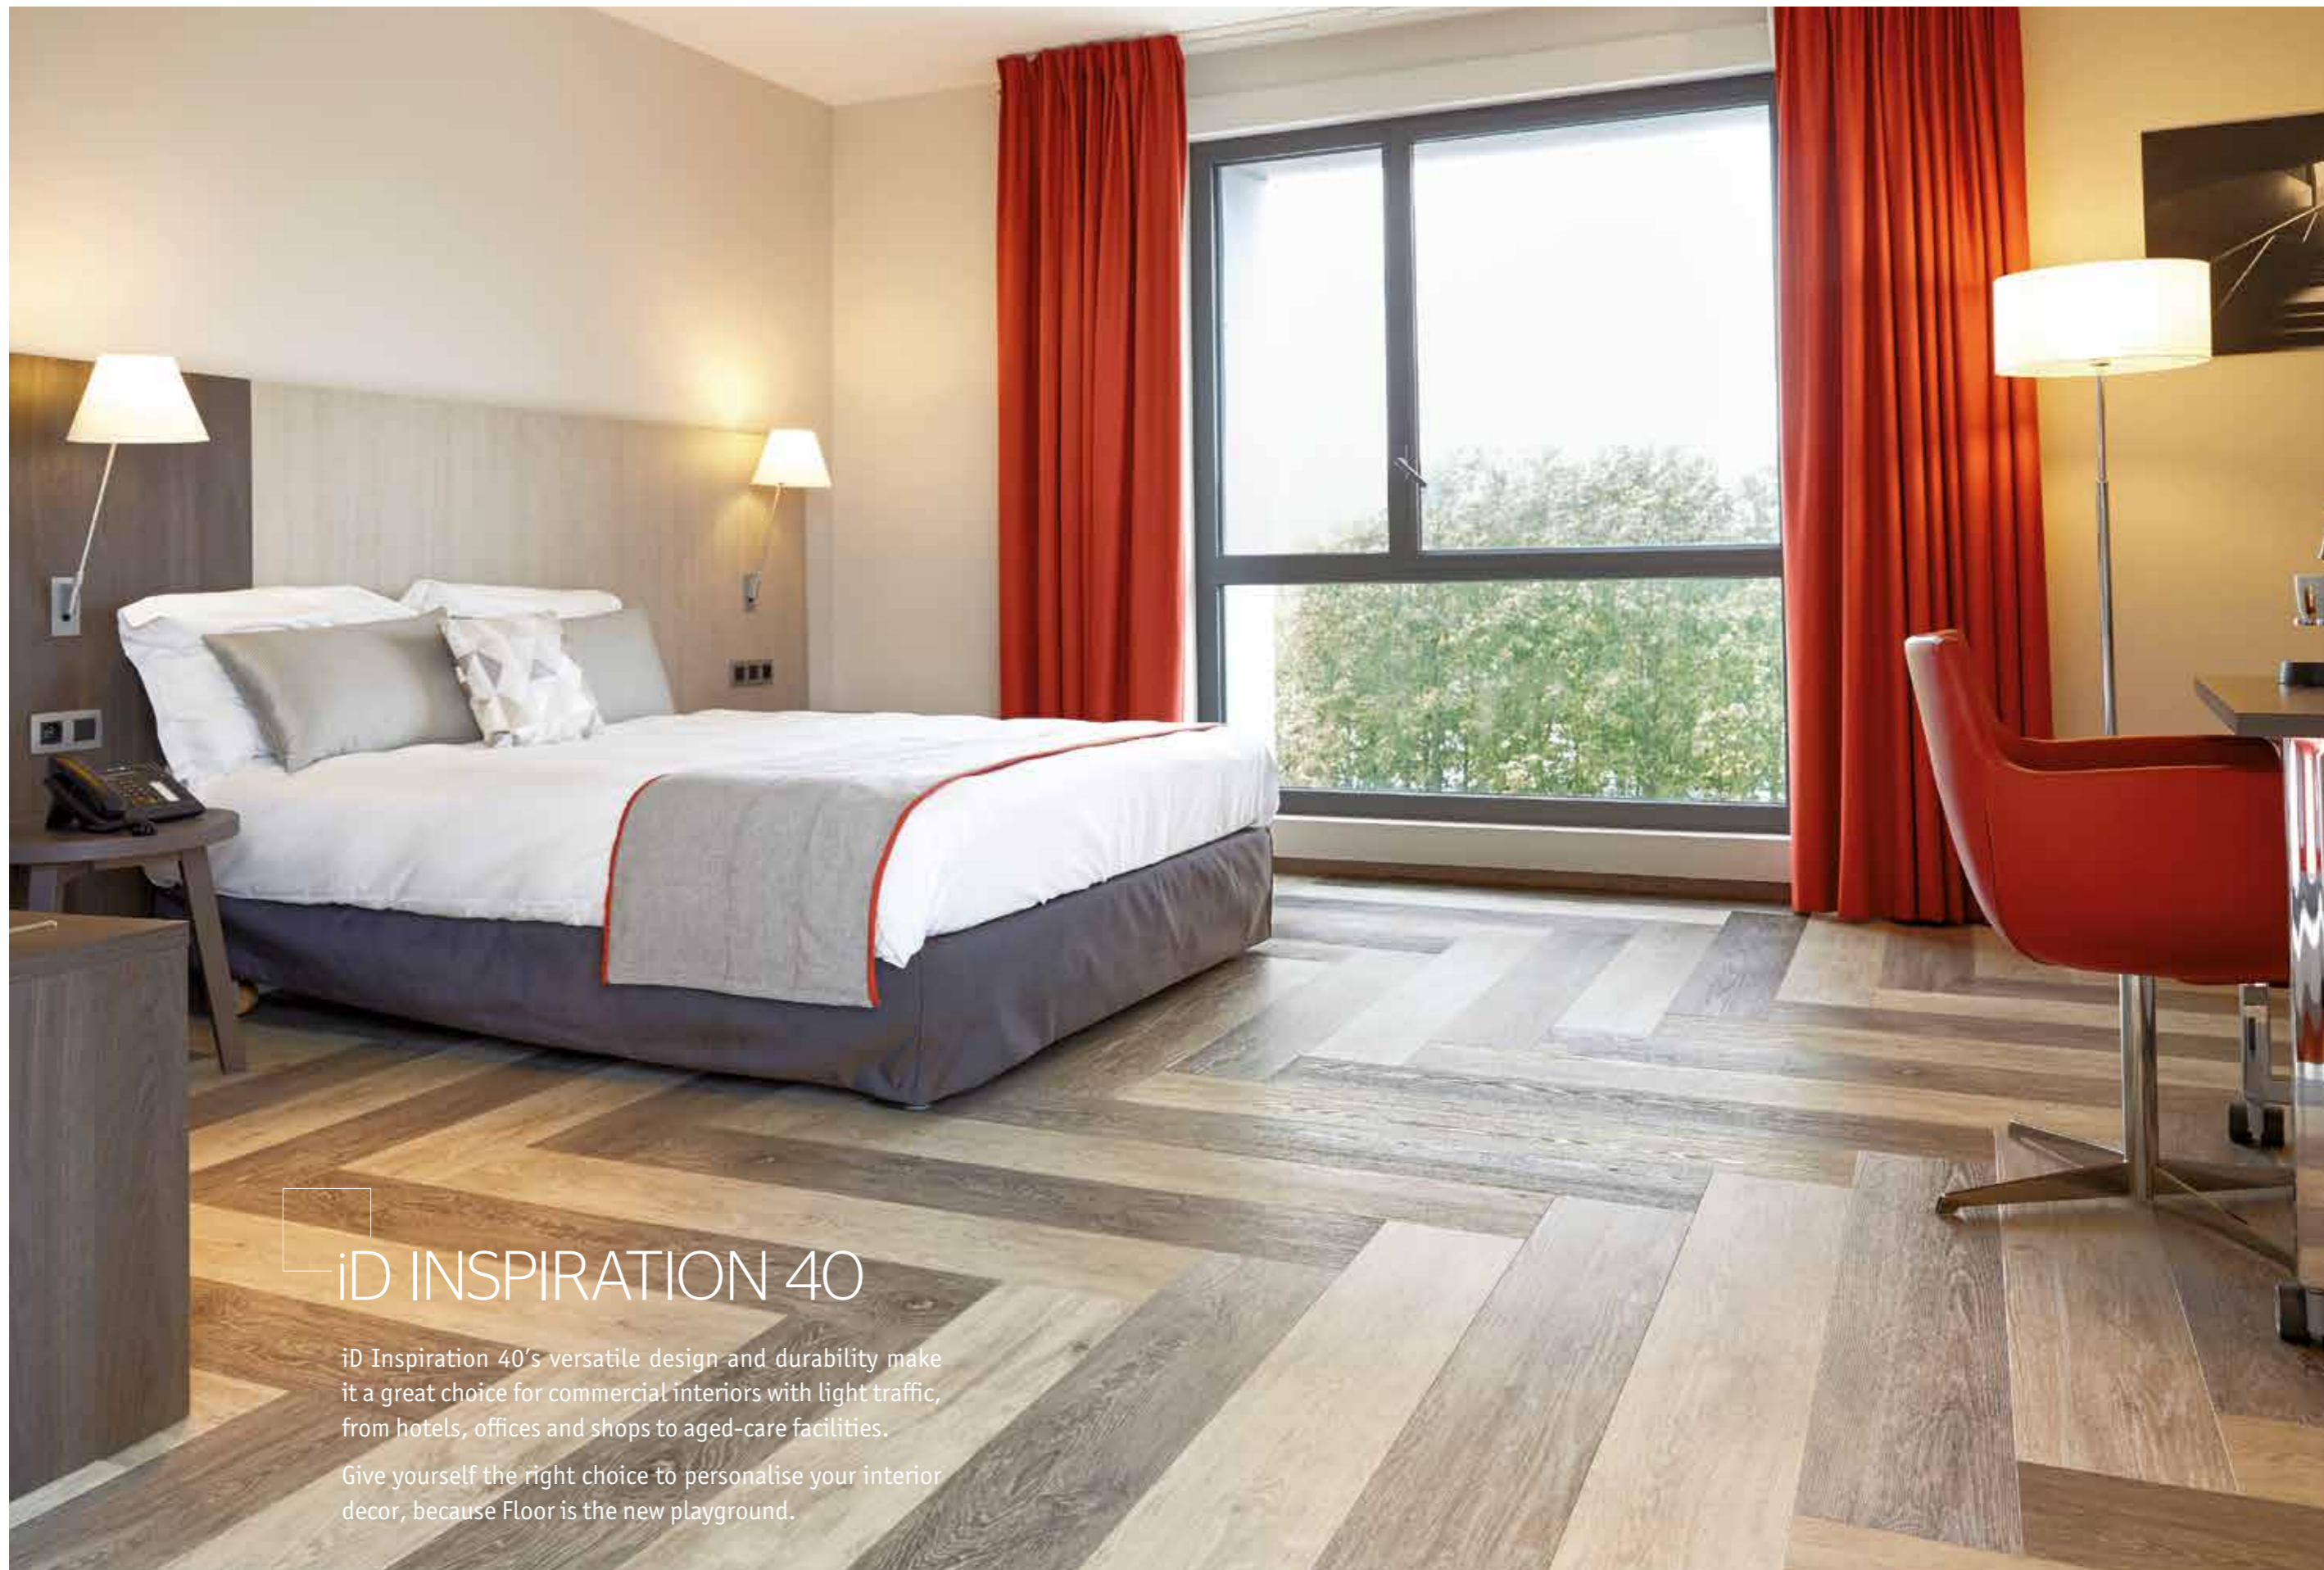

iD INSPIRATION 40

iD Inspiration 40's versatile design and durability make it a great choice for commercial interiors with light traffic, from hotels, offices and shops to aged-care facilities.

Give yourself the right choice to personalise your interior decor, because Floor is the new playground.

White Oak / Light - Grey

iD INSPIRATION 40

DESIGN YOUR OWN FLOOR DECOR

- Get creative with a carefully chosen range of 34 colours and patterns plus a variety of plank and tile formats.

ACCESSORY PACKAGE

- Compact skirting with decorative film and PUR surface treatment to match all 34 designs.
- All accessories for user safety, stairs and transitions.


HARD WEARING AND EASY CLEANING

- Treated with TopClean XP™ for a tougher surface and simpler care, reducing the need for water, energy and chemical detergents.

A SUSTAINABLE SOLUTION

- Helps improve indoor air quality with VOC emissions below quantifiable levels, under 10µg/m³ after 28 days.
- Uses phthalate-free technology based on alternative plasticizers.
- Made in Germany to benefit from our best-in-class industrial expertise.

PRODUCT CONSTRUCTION

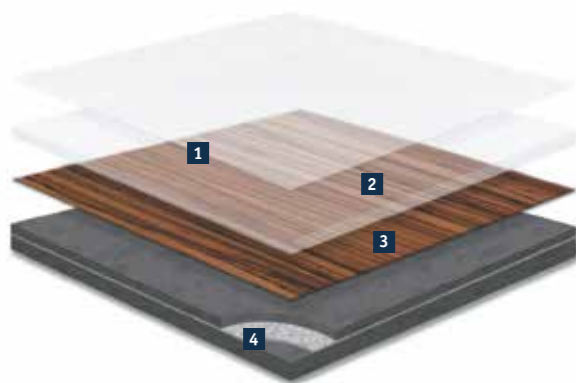

- 1 Topclean XP™ PUR reinforcement**
for excellent resistance to abrasion, scuffs and scratches plus easy, low-cost maintenance
- 2 0.40mm pure PVC transparent anti-wear layer**
for an exceptionally hard-wearing and indentation-resistant surface
- 3 34 designs in high-definition print**
for a higher quality, more natural look
- 4 Unique structure strengthened with non-woven glass fibre**
for class-leading dimensional stability with superior performance against indentation and tearing



Polished Concrete / Light Grey - Medium Grey - Dark Grey

iD INSPIRATION 40



Antik Oak
Grege
24260 134 20 x 122 cm
LRV: 38.05%
Skirting: 26640 383



Antik Oak
White
24260 133 20 x 122 cm
LRV: 36.56%
Skirting: 26640 382



Antik Oak
Classical
24260 135 20 x 122 cm
LRV: 33.43%
Skirting: 26640 384



Antik Oak
Light Brown
24260 132 20 x 122 cm
LRV: 29.93%
Skirting: 26640 381



Maple
Studio
24261 143 16.66 x 100 cm
LRV: 44.82%
Skirting: 26640 393



Modern Oak
Beige
24260 145 20 x 122 cm
LRV: 43.49%
Skirting: 26640 395



Modern Oak
Classical
24260 146 20 x 122 cm
LRV: 33.86%
Skirting: 26640 396



Modern Oak
White
24260 144 20 x 122 cm
LRV: 21.04%
Skirting: 26640 394



Antik Oak
Dark Brown
24260 136 20 x 122 cm
LRV: 12.48%
Skirting: 26640 385



Brushed Pine
White
24260 016 20 x 122 cm
LRV: 42.66%
Skirting: 26640 266



Brushed Pine
Natural Grey
24260 137 20 x 122 cm
LRV: 29.59%
Skirting: 26640 387



Brushed Pine
Light Brown
24260 138 20 x 122 cm
LRV: 28.41%
Skirting: 26640 388



Patina Ash
Beige
24260 106 20 x 122 cm
LRV: 43.21%
Skirting: 26640 343



Patina Ash
Grey
24260 108 20 x 122 cm
LRV: 31.03%
Skirting: 26640 345



Patina Ash
Brown
24260 107 20 x 122 cm
LRV: 29.79%
Skirting: 26640 344



Rustic Oak
Light Grey
24260 124 20 x 122 cm
LRV: 45.58%
Skirting: 26640 373



English Oak
Grege
24260 139 20 x 122 cm
LRV: 32.87%
Skirting: 26640 389



English Oak
Classical
24260 141 20 x 122 cm
LRV: 30.06%
Skirting: 26640 391



English Oak
Dark Brown
24260 140 20 x 122 cm
LRV: 9.16%
Skirting: 26640 390



Large Beech
Natural
24261 142 16.66 x 100 cm
LRV: 31.08%
Skirting: 26640 392



Rustic Oak
Natural
24260 125 20 x 122 cm
LRV: 35.52%
Skirting: 26640 374



Rustic Oak
Medium Grey
24260 123 20 x 122 cm
LRV: 21.68%
Skirting: 26640 372




Rustic Oak
Brown
24260 127 20 x 122 cm
LRV: 20.49%
Skirting: 26640 375



Soft Walnut
Classical
24260 149 20 x 122 cm
LRV: 17.24%
Skirting: 26640 400

iD INSPIRATION 40

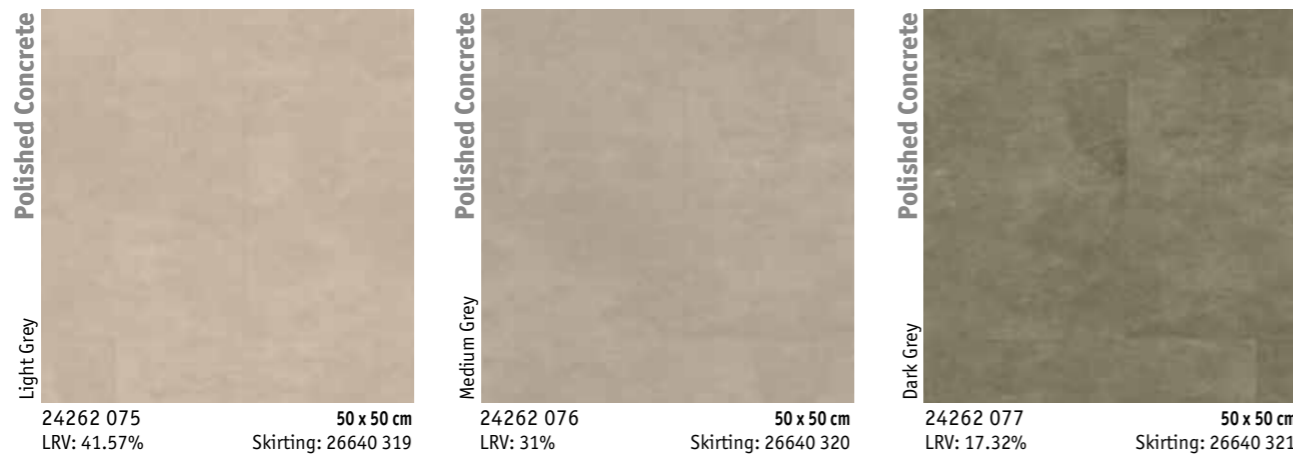

ACCESSORIES

PVC DECORATIVE SKIRTING

Compact skirting with decorative film and PUR surface treatment to perfectly match all designs.

Packaging: 2.02lm skirting in packs of 16




ALUMINIUM TRANSITION PROFILE

Transition profile. To be screwed.

2 colours: Silver 1451 000
Bronze 1451 001

Packaging: 2.7lm profiles in packs of 10

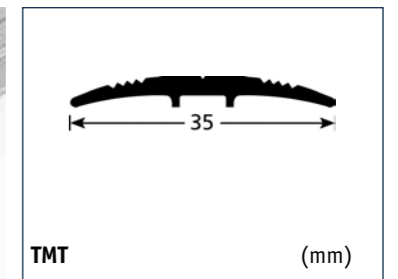


ALUMINIUM STAIRNOSE

Stairnose. To be screwed over the floorcovering.

1 colour: Silver 1434 001

Packaging: 2.6lm profiles in packs of 10

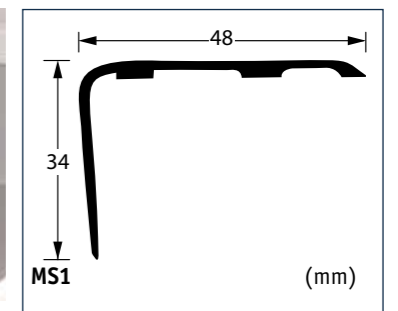

3D STUD

Accessibility accessory. Ready-to-use podotactile studs to be simply fitted on top of the existing floorcovering.

Packaging: 5mm x 25mm stud in packs of 200



Self-adhesive		
	White	1440 050
	Grey	1440 051
	Black	1440 052
	Ivory	1440 053
	Red	1440 054
	Yellow	1440 055

iD INSPIRATION 40

FEATURE STRIP COLOURS

Create visual effects with contrasts of colours to highlight interior features, shape perceptions of a room size or personalise your flooring design.

BLACK	1421 001	ROYAL BLUE	1421 011
SILVER	1421 002	TOBACCO	1421 008
COPPER	1421 012	DARK GREY	1421 009
GOLD	1421 003	RED	1421 010
EGGSHELL	1421 013		



Feature strips /Dark Grey - Red

TECHNICAL DATA


CERTIFICATION & CLASSIFICATION	STANDARDS	iD Inspiration 40
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	Domestic: 23 Commercial: 32 Industrial: 41
TECHNICAL CHARACTERISTICS	STANDARDS	iD Inspiration 40
Total thickness	EN ISO 24346	2,2 mm
Wear layer thickness	EN ISO 24340	0,4
Total weight	EN ISO 23997	3700 g/m ²
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342	
	Planks	16,66 x 100 cm, 25 planks/box = 4,17 m ² 20 x 122 cm, 17 planks/box = 4,15 m ²
	Tiles	50 x 50 cm, 17 tiles/box = 4,25 m ² 50 x 100 cm, 8 tiles/box = 4,00 m ²
Surface treatment (PUR)		Yes - TopCleanXP™
Beveled edges		No
TECHNICAL PERFORMANCES	STANDARDS	iD Inspiration 40
Dimensional stability	EN ISO 23999	≤ 0,10 %
Curl resultant to heat	EN ISO 23999	≤ 2 mm
Reaction to fire	EN 13501-1	B _{fl} -s1 glued over concrete substrate B _{fl} -s1 glued over wood substrate
Residual indentation	EN ISO 24343-1	≤ 0,05 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 - EN 425	No damage
Impact sound reduction	EN ISO 717-2	ΔL _w = 3 dB
Reduction of in-room impact noise	EN ISO 31-074	Class C (L _{n,r,w} < 85 dB)
Thermal resistance	EN ISO 10456	0,02 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6
Chemical resistance	EN ISO 26987	Not affected (0)
Slip resistance	DIN 51130 EN 13893	R9 / R10 depending on embossing μ ≥ 0,30
Electrical properties	EN 1815 EN 1081	<2 kV on concrete > 10 ⁹ Ohm
Peeling resistance	EN ISO 24345	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (07/16).
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.
Please contact Tarkett at the address shown for these instructions.

CUSTOMS TARIFF: 482050000000F



Logistics Information



Surface treatment



General Information



FLOOR IS THE NEW PLAYGROUND

flooristhewnewplayground.tarkett.com

■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett France Belux – Tel. +32 16 35 98 80 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH, Bereich Objekt – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett GDL SA – Tel. +352 949 211 8804 ■ Netherlands: Tarkett Holding GmbH, Vestiging Nederland – Tel. +31 416 685 491 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE: Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett France SAS, org. slozka – Tel. +420-271 001 602 ■ Hungary: Tarkett France SAS – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 ■ Russian Federation: ZA0 Tarkett RUS – Tel. +7 495 775 3737 ■ Slovakia: Tarkett France SAS, org.zlozka – Tel. +421 248 291 317 ■ South East Europe: Tarkett Trade d.o.o. – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 569 12 21 ■ **ASIA AND OCEANIA:** Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ India: Tarkett France (India Branch) – Tel. +91 11 4352 4073 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** Brazil: Tarkett – Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur – Tel. +54 11 47 08 07 72 / +54 9 11 44 46 88 82 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett – Tel. +55 11 9 8410 9310 / +55 11 95494 0069 ■ Mexico / Central America: Tarkett Latam Mexico – Tel. +55 11 98410 9310



www.tarkett.com